


# SRCC SPORTS 2000 PINTO CHAMPIONSHIP SPORTING & TECHNICAL REGULATIONS 2020



## COVER PAGE & DOCUMENT CONTROL

Issue Version:	Published Copy
Linked Draft Version:	Draft Copy 6

Originator:	SRCC Technical Panel	Date:	07/2/2020
Signed:		Name:	S Morris

Approval:	SRCC Championship Co-Ordinator	Date:	07/2/2020
Signed:		Name:	H Bates

This document is the property of Sports Racing Car Club (SRCC). It contains confidential information and may not be copied, or the information therein divulged to a third party, without the prior written consent of the Club.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP

## SPORTING & TECHNICAL REGULATIONS 2020

---

The SRCC Sports 2000 Pinto Championship is for competitors participating in open Cockpit 2-seater rear engine sports racing car using the standard Ford 2000 cc single overhead camshaft 'Pinto' engine.

### 1. SPORTING REGULATIONS - GENERAL

#### 1.1 TITLE & JURISDICTION:

The SRCC Sports 2000 Championship is organised and administered by the Sports 2000 Racing Car Club, in accordance with the General Regulations of the Royal Automobile Club Motor Sports Association [Motorsport UK] (incorporating the provisions of the International Sporting Code of the FIA) and these Championship Regulations.

Motorsport UK Championship Permit No: CH2020/R121

Race Status: Interclub

Motorsport UK Championship Grade: D

#### 1.2 OFFICIALS:

1.2.1 Co-ordinator: Heidi Bates, 10 Reeves Close, Whetstone, Leics, LE8 6YQ - 01162752510

1.2.2 Licensed Eligibility Scrutineer: Nigel Thorne 07899 796199

1.2.3 Championship Stewards: Bill Shewan, Brian Hemmings & Mike Dixon

#### **Championship Stewards**

**(G)2.7.** Championship Stewards may only adjudicate on any disputes, irregularities or appeals arising from the approved Championship regulations.

**(G)2.7.1.** Championship Stewards are also empowered to consider any request from the Championship co-ordinator to penalise any Competitor for any breach of Championship regulations after holding a formal hearing to impose a penalty in accordance with C.2.1.1 (subject to the rights of appeal provided for in Section C).

**(W) 2.2.1.** The Championship Stewards can only adjudicate upon any disputes, irregularities or appeals arising from the approved Championship Regulations. They are also empowered to consider any request from the Championship Co-ordinator to penalise any Competitor for breach of Championship Regulations and, after holding a formal hearing, to impose a penalty in accordance with C.2.1, subject to the rights of appeal to the MSC provided in Section C.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

## 1.3 COMPETITOR ELIGIBILITY:

### 1.3.1 Entrants must:

- (a) be fully paid up members of the SRCC and
- (b) be Registered for the Championship and
- (c) be in possession of a valid Motorsport UK Entrants Licences.

### 1.3.2 Drivers and Entrant/Drivers must:

- (a) Be current Members of the SRCC and
- (b) be Registered for the Championship and
- (c) be in possession of valid Competition "Race Interclub" status Licence, as a minimum
- (d) Or be in possession of the highest grade of national Race licence or valid FIA International Licence, together with their ASN's written consent ((H)26.2. and FIA ISC Article 2.3.7.b applies)
- (e) If participation in the Championship requires absence from education a driver, in full time school education is required to have the approval of their head teacher and a letter stating such approval from their school in order to fulfil registration for the Championship. A driver shall not take time out of their education to participate in motor sport without the prior written approval of their education establishment.

1.3.3 All necessary documentation must be presented for checking at all rounds when signing-on.

## 1.4 REGISTRATION:

1.4.1 All competitors must register for the championship by returning the Registration Form with the Registration Fee to the Club Secretary prior to the Final Closing date for the first round being entered.

1.4.2 The Registration Fee is £ 225 – made payable to:- SRCC by Cheque or by BACS to

SRCC  
Barclays Bank  
Sort Code 20-66-51  
Account No. 60593923

1.4.3 Registration numbers will be the permanent Competition numbers for the Championship.

## 1.5 CHAMPIONSHIP EVENTS:

The Championship will be contested over 9 rounds (6 events) as follows:

Date	Track /Course/ Venue	Permit Grade	Organiser	Race Length
<u>4/5 April</u>	<u>Donington Park National</u>	<u>Interclub</u>	<u>MSVR</u>	<u>50 Minutes</u> <u>To include a mandatory 2</u> <u>minute pit stop</u>
<u>2/3 May</u>	<u>Brands Hatch GP</u>	<u>Interclub</u>	<u>MSVR</u>	<u>30 Minutes</u>
<u>20 June</u>	<u>Oulton Park International</u>	<u>Interclub</u>	<u>MSVR</u>	<u>25 Minutes</u>
<u>20 June</u>	<u>Oulton Park International</u>	<u>Interclub</u>	<u>MSVR</u>	<u>25 Minutes</u>

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

<u>11/12 July</u>	<u>Snetterton 300</u>	<u>Interclub</u>	<u>MSVR</u>	<u>25 Minutes</u>
<u>11/12 July</u>	<u>Snetterton 300</u>	<u>Interclub</u>	<u>MSVR</u>	<u>25 Minutes</u>
<u>15/16 August</u>	<u>Silverstone GP</u>	<u>Interclub</u>	<u>MSVR</u>	<u>30 Minutes</u>
<u>19/20 September</u>	<u>Brands Hatch Indy</u>	<u>Interclub</u>	<u>MSVR</u>	<u>25 Minutes</u>
<u>19/20 September</u>	<u>Brands Hatch Indy</u>	<u>Interclub</u>	<u>MSVR</u>	<u>25 Minutes</u>

## 1.6 SCORING:

1.6.1 Points will be awarded to Competitors listed as classified finishers in the Final Results as follows:-

Points will be only be awarded to Championship Registered Competitors listed as classified finishers, in the Final Results as follows: for the Overall Pinto Championship - 1st-15; 2nd-14; 3rd-13; 4th-12; 5th-11; 6th-10; 7th-9; 8th-8; 9th-7; 10th-6; 11th-5; 12th-4; 13th-3; 14th-2; 15th- and all other classified finishers -1 point. For Each Class (A & B) - 1st-15; 2nd-14; 3rd-13; 4th-12; 5th-11; 6th-10; 7th-9; 8th-8; 9th-7; 10th-6; 11th-5; 12th-4; 13th-3; 14th-2; 15th- and all other classified finishers -1 point.

Note: Championship Registered Competitors who qualify but are not classified as a finisher in the Final Results will be awarded 1 point (unless the non-classification is due to the imposition of a penalty). Overall and Class Championships are scored separately.

1.6.2 The totals from all qualifying Events run less 1 will determine final championship points and positions.

1.6.3 Ties shall be resolved using the formula in (W)1.3.4. in the current Motorsport UK Yearbook.

1.6.4. Where the race distance has been reduced (2.6.) it shall still count as a full points scoring round.

1.6.5. Competitors not registered for the Championship may be permitted on an individual round basis and will:

- (a) be deemed "Guest Competitors"
- (b) not score points and for the purpose of points scoring will be ignored
- (c) qualify for Event awards
- (d) comply with the eligibility criteria as prescribed in Article 1.3. above, with the exception of 1.3.1. (b) and 1.3.2. (b), as appropriate.

1.6.6. Where a combined race for any of the SRCC Sports 2000 Championships, Pinto, Historic or Duratec, is listed as a Championship Round in the regulations, the following shall apply:

- (a) For Championship Rounds listed as a 'Single Race or Single Standalone Race' there will be a single qualifying session, with the single combined grid based on the fastest qualifying times irrespective of championship. A single results sheet will be published but points will be awarded separately, in accordance with the individual championship regulations to cars competing in the SRCC Sports 2000 Pinto, Historic and Duratec Championships. Thus the first Duratec car to finish is awarded 15 points, the first Pinto car to finish is awarded 15 points and the first Historic car is awarded 15 points etc. as in 1.6.1.
- (b) For Championship Rounds listed as a 'Double Header' there will be a single qualifying session, with the single combined grid based on the fastest qualifying times irrespective of championship, for race 1. Race 2 grid positions will be determined by the overall finishing order of race 1. Non finishers in race 1 will be allocated grid positions at the back of the grid

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

and in order of non-finishing i.e. the first car to non-finish will be furthest back on the grid. A single results sheet will be published for each race and points will be awarded separately, in accordance with the individual championship regulations to cars competing in the SRCC Sports 2000 Pinto, Historic and Duratec Championships. Thus, in each race, the first Duratec car to finish is awarded 15 points, the first Pinto car to finish is awarded 15 points and the first Historic car is awarded 15 points etc. as in 1.6.1.

1.6.7. Where an SRCC Sports 2000 Pinto Championship Round is combined with an SRCC Sports 2000 Endurance Championship Round, the following shall apply:

- (a) Competitors registered for both the SRCC Sports 2000 Pinto Championship and the SRCC Sports 2000 Endurance Championship and completing the round as a single driver entry will be awarded points towards both championships in line with the respective regulations.
- (b) Competitors wishing to share a car for a combined round may do so. Where a car is shared and both competitors are registered for the Sports 2000 Pinto Championship, both competitors will receive equal points in line with 1.6.1.
- (c) Competitors wishing to share a car for a combined round with a Guest Competitor in line with 1.6.5 of the SRCC Sports 2000 Pinto Championship Regulations may do so. In such circumstance only the registered competitor will receive points in line with 1.6.1.

## 1.7 AWARDS:

1.7.1 All awards are to be provided by the SRC

1.7.2	Per Event:	Trophies to 1st, 2nd, and 3rd in each Class. (dependent on the number of entrants).
1.7.3	Championship:	Championship trophy to the overall championship winner (to be retained for one year). Trophies to 1st, 2nd, 3rd in each Class
1.7.4	Presentations:	Awards will be presented at the end of each event, and/or at the end of the Championship at the designated presentation ceremony

1.7.5 Deleted

1.7.6 Title to all Trophies: If Provisional Results or Championship Tables are revised after any presentations and these revisions affect the distribution of awards the Competitors concerned must return them to the organisers in good condition within 7 days

## 2. CHAMPIONSHIP EVENT MEETINGS & RACE PROCEDURES

### 2.1 ENTRIES:

2.1.1 Competitors are responsible for submitting complete entries with the correct entry fee prior to the closing date for entries before each event. Entries are to be submitted via the Motor Sport Vision (MSVR) online entry system. A link to the MSVR entry system will be provided on the SRCC

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

website.

2.1.2 Incorrect or incomplete entries (Including Driver to be Nominated Entries) are to be held in abeyance until they are complete and correct and the date of receipt for acceptance of entry purposes shall be the date on which the Meeting Organiser receives the missing or corrected information or fee.

2.1.3 Any withdrawal of Entry or Driver/Car changes made after acceptance of any entry must be notified to the Meeting Organisers in writing. D25.1.12. applies.

2.1.4 The Entry Fee for each event shall be specified on online the entry form.

2.1.5 Reserves will be listed in the Final List of Entries published with Final Instructions or in a Bulletin.

## 2.2 BRIEFINGS:

Organisers should notify Competitors of the times and locations for all briefings in the Final Instructions for the meetings. Competitors must attend all briefings.

## 2.3 QUALIFICATION PRACTICE:

2.3.1. Should any Practice session be disrupted the Clerk of the Course shall not be obliged to resume or re-run the session; the decision of the Clerk of the Course shall be final.

2.3.2. Each driver shall complete a minimum of 3 laps in the car to be raced, and in the correct session, in order to qualify (General Regulations Q4.5).

## 2.4 RACES:

The Race distances shall be as specified in 1.5 above. Should any race be disrupted the Clerk of the Course shall not be obliged to resume or rerun the race ((Q)5.4.) (1.6.4. above applies)

### 2.4.1 Pit stops

a Pit stops will take place in front of each teams allocated pit garage or pit area (the pit box).

b During a race requiring a mandatory pit stop this must take place between a between 20 and 40 minutes of the overall race time, under the responsibility of the team manager. A 'Pit Lane Open' warning sign will be displayed on the start/finish line for the duration of the Pit Lane Open period. The pit stop will be of a controlled minimum duration of 2 minutes. Timing for the pit stop begins when the car triggers the timing loop at the pit lane entry. The stop is considered to be complete when the car triggers the timing loop at the pit lane exit. These points will be indicated by boards in the pit lane indicating the start of the pit lane speed limit and the end of the pit lane speed limit.

c No work shall be carried out on the car, until the car comes to a complete standstill and the engine is stopped. The driver may remain in the car, unless refuelling is taking place. The engine must not be restarted until all work is completed and the driver is seated in the car with all the belts done up correctly. Refuelling will be permitted providing Motorsports UK Yearbook regulations (Q) 13.1.1 to 13.1.4 are complied with. The only exception is that closed loop (dry break) refuelling rigs are not permitted. Refuelling must only be carried out at the beginning or end of the pit stop. While refuelling is being carried out, the car must remain on its wheels and no other work carried out on the car.

d During the pit stop the maximum number of personnel authorised to work on the car is 4, inclusive of driver(s).

e Only one of the authorised personnel is allowed to assist with the driver change/seat belt

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

securing.

- f If refuelling is to take place, the team must provide a Fire Marshal as per Motorsports UK Yearbook regulations (Q) 13.1.2. Additionally, during refuelling, the Fire Marshall is not authorised to touch the car, parts or any equipment, other than the fire extinguisher
- g Tyre changing is only permitted where a puncture occurs or the tyre/tyres are deemed to have a negative impact on safety. In such cases, the tyre or tyres must be immediately submitted to the Championship Scrutineer (or his appointed deputy) for verification of fact. If a tyre is changed without verification of fact being sought and agreed, a time penalty will be added to the cars overall race time (see art. 4 Championship Race Penalties).
- h If a driver does not make their mandatory pit stop, or leaves the pits before the correct minimum duration, the driver will have to perform a stop and go penalty (see art. 4 Championship Race Penalties). If it is impossible for this stop and go to take place during the race, a time penalty will be added to the cars overall race time.

## 2.5 STARTS:

2.5.1 All cars will be released to form up on the grid prior to the start in formation as specified on the grid sheet.

2.5.2 The start will be via Standing start in Sprint format races and Rolling start in Endurance format races.

The minimum Countdown procedures/audible warnings sequence shall be:-

- a) 1 minute to start of Green Flag/Pace Lap - Start Engines/Clear Grid.
- b) 30 Seconds - Visible and audible warning for start of Green Flag/Pace Lap.
- c) A five second board will be used to indicate that the grid is complete.
- d) The red lights will be switched on five seconds after the board is withdrawn.

2.5.3 Any car removed from the grid after the 1 minute stage or driven into the pits on the Green Flag lap shall be held in the pitlane and may start the race after the last car has passed the startline or pitlane exit, whichever is the later to take the start from the grid.

2.5.4. Any driver unable to start the Green Flag/Pace lap or start are required to indicate their situation as per General Regulation (Q)12.13.2. In addition any driver unable to maintain grid positions on the Green Flag Lap, to the extent that ALL other cars are ahead of them, may complete the Green Flag lap but MUST remain at the rear of the last row of the grid but ahead of any cars to be started with a time delay.

2.5.5. In the event of any starting lights failure the Starter will revert to use of the National Flag.

## 2.6. SESSION RED FLAG

Should the need arise to stop any race or practice, RED LIGHTS will be switched on at the Startline and RED FLAGS will be displayed at the Startline and at all Marshals Signalling Points around the Circuit.

This is the signal for all drivers to cease circulating at racing speeds, to slow to a safe and reasonable pace and to return to the pit lane, during practice, and to the starting grid area, during a race, unless otherwise directed by officials.

Cars should not enter the Pits unless directed to do so and all cars in the pit lane during a red flag period must take any restart from the pit exit.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

## 2.7. PITS, PADDOCK & PITLANE SAFETY:

- 2.7.1. Pits & Paddock: Competitors must ensure that the Motorsport UK, Circuit Management and Organising Club Safety Regulations are complied with at all times.
- 2.7.2. Pitlane: The outer lane or lanes are to be kept unobstructed to allow safe passage of cars at all times. The onus shall be on all Drivers to take all due care and respect the pit lane speed limits.
- 2.7.3. Refuelling: May only be carried out in accordance with the General Regulations, the Organising Club Regulations, Circuit Management Regulations and the SRs or Final Instructions issued for each Circuit/Meeting.
- 2.7.4. Speed Limit: Pit Lane Speed Limit will be 60kph

## 2.8. RACE FINISHES:

- After taking the Chequered Flag drivers are required to:
- progressively and safely slow down
  - remain behind any competitors ahead of them,
  - return to the Pit Lane Entrance/Paddock Entrance as instructed,
  - comply with any directions given by Marshals or Officials
  - keep their helmets on and harnesses done up while on the circuit or in the pitlane.

## 2.9. RESULTS:

All Practice Timesheets, Grids, Race Results are to be deemed Provisional until all vehicles are released by Scrutineers after Post Practice/Race Scrutineering and/or after completion of any Judicial or Technical Procedures. (General Regulation (D)26.3.)

- 2.10. **TIMING MODULES:** All competitors are required to purchase and fit an approved Electronic Self Identification Module (transponder) to their cars for the purposes of accurate timing. It is the responsibility of the competitor to fit these to car in the position and manner specified by the supplier/timing Company. The Modules must be in place and functioning correctly for all Championship qualifying practice sessions and races.

## 2.11. Deleted

- 2.12. **OPERATION OF SAFETY CAR:** The Safety Car will be brought into operation and run in accordance with Section Q, Appendix 2 of the Motorsport UK General Regulations.

- 2.13. **ONBOARD CAMERAS:** It is mandatory for all cars to have an on-board camera fitted and functioning during every session (see also 4.2 4). It is the driver and/or teams' responsibility to supply and fit the camera. It is the driver and/or teams' responsibility to ensure the camera is switched on and recording before every session that the battery has been charged sufficiently to record the entire session and that there is sufficient memory on the card inserted to record the entire session. A clear forward-facing visual is required, the angle and quality of footage may be inspected at any time. Any party/team that fails to comply may incur a penalty in accordance with Judicial Procedures.



# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

## 3. SPECIFIC CHAMPIONSHIP REGULATIONS

### 3.1 DRIVING STANDARDS - SRCC RACES ARE NON-CONTACT RACES.

3.1.1 You may only move once in front of a car, that is to say you can only move left or right in front of the car, not both.

3.1.2 Pushing or squeezing competitors off the track is strictly forbidden (i.e. reducing the available track width to less than a cars width). If two car approach a bend together (i.e. side by side), then the car on the racing line cannot chop the corner (i.e. cannot take the racing line) space must be given to the car on the inside. Once the car on the inside is half way alongside (i.e. front wheels level with the driver) then space must be given to that car. Although sports 2000 cars have enclosed wheels the cars must be driven as if they are single seaters. You can go through bends side by side.

3.1.3 Over aggressive driving is also not acceptable and includes such behaviour, but not exclusively, as going for gaps that are not there or are clearly closing, using other competitor's cars as physical brakes or would rather cause a serious accident than be prepared to lift on the throttle or brake especially at the start and first bend.

3.1.4 Blinkered vision, driving without the use of mirrors and therefore having no awareness of other cars around you.

### 3.2 POLICING POLICY

3.2.1 Any competitor found to be transgressing any of the SRCC rules as outlined or is deemed to be driving inappropriately will be served with either a written warning or a written notification that they have received a yellow card. if the same person is found to transgress these rules having already received a yellow card then they will receive a red card. a further transgression by a red card holder will result in the return of their racing membership and will be unable to race in any SRCC event for a period of 12 months.

3.2.2 The committee reserve the right, depending on the circumstances and severity of the incident, to escalate the competitor to any of the stages outlined above.

3.2.3 All transgressions only apply within one year and are not carried over to the next year.

3.2.4 Competitors have a right of appeal to the SRCC committee in writing within 7 days of receiving a 12 month ban

3.2.5 Policing driving standards is essential for the success of our formula and is undertaken for your benefit, it is therefore appreciated if any competitor/member witnesses or has on board footage of an incident please make yourself known to our clerk of the course in the first instance and as soon as possible after the race.

3.2.6 Policing driving standards also involves driver training/education. with many novice drivers in our formula it is important that all incidents are reported so they can be discussed and learnt from to ensure we all can enjoy close competitive racing without fear of expensive damage.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

## 4. SPECIFIC CHAMPIONSHIP PENALTIES:

In accordance with Section C of the current Motorsport UK Yearbook and the Sporting regulations issued for the championship..

### 4.1. INFRINGEMENTS OF TECHNICAL REGULATIONS:

4.1.1. Arising from post practice Scrutineering or Judicial Action: Minimum Penalty: The provisions of General Regulation: C3.3.

4.1.2. Arising from post-race Scrutineering or Judicial Action:  
Minimum Penalty: The provisions of General Regulations: C3.5.1 (a) and (b).

For infringements deemed to be of a more serious nature the Clerk of the Course will invoke the provisions of Regulation C3.5.1 (c).

### 4.2. Additional specific championship penalties

#### INFRINGEMENTS OF NON-TECHNICAL REGULATIONS:

4.2.1. As per current Motorsports UK Judicial Procedure Regulations. If excluded the driver shall count that event as one of the point scoring rounds counting to his total championship score.

4.2.2. Driving Standards Penalties as per Section 3.2.

4.2.3. The Clerk of the Course and/or Stewards of the Meeting may apply other penalties, such as 'Stop and Go or Drive Through' during races as deemed applicable.

4.2.4. The Championship Clerk of the Course and/or Championship Stewards may request in-car camera footage from any competitor reported of adverse driving/behaviour during a Championship race meeting. This footage (where applicable) must be made available by the competitor.

## 5 TECHNICAL REGULATIONS

### 5.1 INTRODUCTION:

The following Technical regulations are set out in accordance with the Motorsports UK specified format. Vehicles must be in compliance with Motorsports UK General Technical & Safety Regulations as per [J, K & Q] as appropriate. It should be clearly understood that if the following texts do not clearly specify that you can do it you should work on the principle that you cannot. The Eligibility Scrutineer may seal engines and transmissions at any time during the racing season for later inspection. At the time of the inspection, a member of the SRCC Technical Committee may accompany the Eligibility Scrutineer.

5.1.1 Scrutineering: The official Motorsports UK Eligibility Scrutineer or his appointed deputy will be attending rounds of the championship and he is available to provide advice as well as ensuring that the regulations are strictly enforced to ensure fair play.

5.1.2 To allow for the use of scrutineer's wire seals, certain components must have the heads of 2 adjacent securing bolts or the joint flange in 2 opposite locations, cross-drilled. The cross drilling will leave a through hole of 1.6mm minimum diameter. The components that must be made ready for sealing are: Cam Cover. Sump. Differential Side Plates. Inlet Manifold (To Head) Carburettor (To Inlet Manifold). Carburettor Top (To Carburettor Body) Failure to comply renders the engine ineligible. Motorsports UK Regulation J3.1.5 & J3.1.6 applies. See also 5.7.1 s)

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

5.1.3 In addition to the requirements to seal engines/gearboxes for eligibility checks, the eligibility scrutineer may request direct access to on-board data logger systems (if fitted) for the purpose of analysis. Any refusal will be seen as a breach of the standards of conduct as per 4.2.2)

## 5.2 GENERAL DESCRIPTION:

5.2.1 The SRCC Sports 2000 Pinto Championship is for competitors participating in open Cockpit 2-seater rear engine sports racing car using standard Ford 2000 cc single overhead camshaft 'Pinto' engine with 2-venturi carburettor. Sports 2000 is a restricted class. Therefore any allowable modifications, changes or additions are as stated herein. There are no exceptions. IF IN DOUBT, DON'T. Cars will run in 2 classes:

5.2.2 Class A is for all cars manufactured after 31/12/86. Class B is for cars manufactured after 31/12/82 but before 31/12/86. Cars competing in class B must be in the specification for such cars in their original year of manufacture. No updating beyond such specification or other modification is permitted except that class B cars may be updated or modified to accord with the latest specification attained by identical models in their year of manufacture, provided that year is still within the relevant class dates. For example, a car manufactured in January 1983 may be updated to the specification of the same model that was still being produced in December 1985. The onus of proof shall be with the competitor/entrant. The SRCC will implement an approved Vehicle Identification Paper/Logbook for Sports 2000 cars.

5.2.3 Where a hybrid car, utilising parts from different sources (e.g. chassis from one car. body from another) is entered, the year of manufacture of the later donor car will be used for the purpose of determining in which class the car shall run. Those major components (e.g. chassis, suspension, brakes, gearbox) used from the donor car must conform to 5.2.2 regarding original specification. Hybrid cars are not eligible for class H.

## 5.3 SAFETY REQUIREMENTS:

The following Articles of Motorsports UK Regulations Section K will apply: - K1 to K1.5.2, K1.6.2, K1.6.4, K1.6.5, K 1.6.6, K1.7, K1.8, K2.1, K2.1.3, K2.1.4, K2.1.6 TO K2.1.10, K2.3, K3, K3.1, K3.1.2(a) or K3.1.3, K3.1.6 to K3.5, K5.1, K5.2, K6, K7.1 TO K7.4, K8.1, K8.3, K8.4, K8.5, K9.1 to K9.3, K10.1 TO K10.4, K11.1 to K11.3, K13, K14.1 to K14.3

## 5.4 GENERAL TECHNICAL REQUIREMENTS & EXCEPTIONS:

### 5.5 CHASSIS:

5.5.1 Unrestricted except that the use of carbon fibre composite structural materials is prohibited. No engine oil or water tubes are permitted within the cockpit. The engine will be mounted upright and aligned fore and aft in the chassis.

5.5.2 It is the intent of these rules to minimise the use of ground effects to achieve aerodynamic down force on the vehicle.

- i) The chassis and body surfaces, which comprise the underside of the car, shall not deviate from a flat plane by more than 2.5cm or 1". This deviation may not be used to create an aerodynamic device.
- ii) The underside of the car is defined as being within the reference area as per 5.18.1 a)
- iii) The underside of the car (Z0 plane) must incorporate a rectangular rigid surface of minimum 142.24cm measured across the vehicle by minimum 91.44cm measured along the longitudinal axis of the vehicle, which must extend to the full width of the body.
- iv) There must be no aerodynamic devices that are considered 'downforce generating' situated in the reference zone defined in 5.18.1 b)

5.5.3 There must be no stressed part (centre spine/chassis divider/stiffening panel) in the longitudinal

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

section of the chassis structure, between the steering wheel and the seat back and inside of the driver/passenger space that exceeds in height, 30cm (11.8") above the lowest point of the chassis, with the exception of the requirements of driver lateral head restraint (5.5.5). (The lowest point of the chassis is described as the underside of the chassis/ZO plane)

- 5.5.4 It is permitted to fit, between the driver/passenger space, a central removable longitudinal support, maximum cross section 750mm<sup>2</sup> only for the purpose of supporting a lateral head restraint. This support must be removable without the use of tools so as not to hinder driver egress.
- 5.5.5 Space for 2 seats shall be provided each of at least 40cm (15.75") width and shall be positioned symmetrically about the vehicle's longitudinal axis. There shall be at least 25cm (9.9") wide foot space for the driver measured at the pedals. The passenger space should provide as much seat space, elbowroom, foot and legroom in terms of length, width and height as that of the driver space. Battery boxes and fire extinguishers are permitted in the passenger seat area.

## 5.6 BODYWORK INCLUDING SPOILERS.

- i) The body shall provide a cockpit for 2 seats and cover all mechanical components including wheels and suspension members (see 5.6ii) except for the exhaust pipe, induction system and camshaft cover which may protrude through the engine cover.
- ii) Forward of the main rollbar the bodywork must not allow mechanical components to be seen when viewed from any orthogonal direction relative to the chassis major X, Y & Z axes. The exception to this would be any part visible through apertures in the road wheel.
- iii) The bodywork shall project over the complete wheels in such a way as to cover at least one third of their circumference and their entire width. Reference Motorsports UK Regulation [J5.2.6 ]
- iv) Between the front and rear axle lines the body shall:
  - a) Maintain over a minimum of 70% of the length of the wheelbase a minimum vertical height (measured from the lowest point of the chassis), of 20cm (7.9") when viewed from the side, and when viewed from above, a minimum body width exceeding the greatest overall width across the tyres less 15cm (5.9").
  - b) Exceed in height the top of the tyres over a width of 50cm (19.7") excepting only cockpit and engine openings. There shall be no gap between the main body and the wheel arches.
  - c) The bodywork forward of the main rollbar must be symmetrical about the car's longitudinal centre-line. An exception is allowed whereby a cockpit air deflector/windscreen is permitted. Additionally, within the context of this sub-section, any cooling radiator is not considered as part of the bodywork.
- iii) The cockpit opening seen in plan view shall be symmetrical about the longitudinal axis of the car and shall be large enough for a horizontal rectangle of 80cm (31.5") by 40cm (15.75") to be passed through with its minor axis aligned with the vehicle's longitudinal axis. Any driver head restraint fitted which is wholly removable without the use of tools, may be so removed before the application of the cockpit opening template.
- iv) All ducted air for heat exchangers (water/oil) and brakes shall pass through those heat exchangers or onto those brakes.
- v) Maximum vehicle length forward of the front axle centreline: 91.5cm (36") (including spoilers), the maximum vehicle length rearward of the rear axle centreline: 110cm (45.3") (including spoilers)
- vi) Spoilers mounted at the front of the vehicle are permitted. Those spoilers may only be adjusted in a horizontal plane.
- vii) Spoilers mounted at the rear of the vehicle are permitted. Those spoilers may only be adjusted in a plane that is vertical or  $\pm 20^\circ$  of vertical.
- viii) Windscreens are optional.

### 5.6.1 Modifications Permitted:

1. General: None in contravention of 5.6.2 below.
2. Interior: None in contravention of 5.6.2 below.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

3. Exterior: Spoilers mounted at the rear of the vehicle may include a gurney lip/stiffening fold not exceeding 10mm when viewed from above.
4. Silhouette: None in contravention of 5.6.2 below.
5. Ground Clearance: Cars must comply with Motorsports UK regulation [J5.20.11].

## 5.6.2 Modifications Prohibited:

1. General: The body above the chassis level in the region of the cockpit shall not be reinforced in any way that would complicate or hinder the rescue of the driver.
2. Interior: No engine oil or water tubes are permitted within the cockpit.
3. Exterior: Spoilers shall not contravene the maximum vehicle length as defined in 5.6.v) of these regulations, at any time. There must be no gap between their surfaces, or any other spoiler, and the main bodywork. No bodywork/diffuser extension of the underside panel, or support structure for the floor that may be considered to aid down force, is allowed between the inside faces of the rear wheels, from a vertical plane connecting the rear wheel centre points, to the rear extremity of the car. The rear wheel centre points are defined as 'The centre of the axis, about which the rear wheels rotate, while the vehicle is travelling in a forward or rearwards direction'.
4. Silhouette: Maximum height with driver on board excluding safety rollover bar and mirrors shall not exceed at any time 90cm (35.4") measured from the ground.
5. Ground Clearance: See 5.6.1.5 above

## 5.7 ENGINE

5.7.1 Modifications Permitted: Where Ford Motor Co are no longer able to supply replacement parts, it is acceptable, within these rules, to use parts from other sources so long as they are direct replacements, do not increase the engine performance and have been approved by the SRCC Technical Committee. A direct replacement, in these rules, means the part, and any sub components within the part, will be dimensionally within the original Ford drawing tolerances and otherwise would conform to the relevant Ford material and test specifications. The only permitted engine is the Ford 2 litre single overhead camshaft 'Pinto' engine.

- a) Cylinder bores may be increased in size by no more than a + 0.5mm rebore on the standard 90.84mm, with a bore size wear allowance of 0.1mm, giving a maximum bore size of 91.44mm. Max capacity not to exceed 2025 CCs. Stroke 77.050 max – 76.850 min mm.
- b) A standard crankshaft shall be used. Spot machining to achieve balance is permitted. Tuftriding, Parkerizing, shot peening, shot blasting and polishing are permitted. Minimum weight is 12.47Kgs (27.5lbs). Standard oversize and undersize bearings are permitted. This does not allow reducing the bearing surface area by reducing the width of standard bearings.
- c) The flywheel shall be a standard Ford production item for the 2000cc SOHC 'Pinto' engine. The clutch may be a standard unit or an AP Cover plate assembly CP2511-1 with driven plate CP5351-1. Machining to achieve minimum weight and balance is permitted. Flywheel bolts are free and locating dowels are permitted. A Ford 'Kent' 1600 GT starter ring may be fitted. Minimum weight of flywheel and clutch assembly with cover-plate to flywheel bolts and flywheel to crankshaft bolts and dowels, 12.5Kgs.
- d) Maximum compression ratio will be controlled as follows: -
  - i) Minimum cylinder head combustion chamber volume 50cc (not including head gasket). Polishing and/or grinding of the cylinder head to achieve only the required combustion chamber volume is permitted.
  - ii) Standard Ford gasket minimum compressed thickness 0.9mm. Minimum diameter of cylinder aperture 92mm.
  - iii) Pistons shall not protrude above the cylinder block surface at TDC.
- e) Pistons must be the standard Ford component for this engine or absolutely identical aftermarket production pistons, unmodified in any way except for balancing as follows: - To achieve balance material may be removed from the internal surfaces at any location below the lowest point of the gudgeon pin. All external surfaces, dimensions and profiles must remain standard for the nominal size of piston being used, with the exception of the top surface of the piston crown which may be subjected to simple machining to achieve balance and the objectives of the above clause regarding compression ratio. Minimum permitted

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

- weight of piston complete with rings, gudgeon pin and standard Ford connecting rod with bolts and without bearings = 1255 grams. All 3 piston rings shall be fitted. Compression rings and scraper second rings shall be one-piece single homogeneous material type with conventional plain gaps. Chromium or molybdenum plating of the top ring is optional; oil control rings shall be either single piece twin land type or apex 3 piece (2 rails and an expander).
- f) Connecting rods shall be standard Ford parts. Alternate connecting rod and big end bolt assembly part no. M6200C200 are permitted. ARP big end bolts part no. ARPBE03 are permitted.
- g) Machining is permitted to remove metal from the balancing bosses to achieve balance only. In addition the outside diameter of the small end forging may be machined around to the shank blends only. The rod shank may not be machined. Tuftriding, Parkerizing shot peening, shot blasting, polishing etc. are permitted. It is permitted to radius the area around the big end cap retaining bolts.
- h) Inlet and exhaust valves may be Ford OE or aftermarket items as long as the valve is dimensionally identical to the original Ford drawing, and is of similar mass to the OE part. Valves shall remain standard. No re-profiling or polishing is permitted. The original 45° seat angle shall be maintained. Maximum face diameter inlet is 42.2mm Maximum face diameter exhaust 36.2mm Maximum valve stem diameter 8.4mm. Overall length, inlet 111.15mm (±0.5mm). Overall length, exhaust 110.55mm (±0.5mm).
- i) It is permissible to reshape inlet and exhaust ports by removal of metal within limits. Addition of material in any form is prohibited. The maximum diameter of inlet port at manifold head face 39.5mm. Maximum dimension of exhaust port at manifold face 35.5mm x 27mm. The distance between the valve centres and the angles of all the valves shall not be altered.
- j) The only permitted camshafts and rockers are the standard Ford production items for the 2000cc SOHC 'Pinto' engine (which shall be fully manufactured and ground by the Ford Motor Co. and have the following Finis codes: Camshaft-**1584660** Camshaft/follower kit-5004836) or the SRCC approved alternate camshaft kit, supplied by Kent Cams (Part Number SRCC2000K). The camshaft and rockers shall remain entirely unmodified. Offset keys are permitted. Vernier pulleys are permitted. It is prohibited to grind from blanks, regrind or re-profile. Tuftriding or Parkerizing is permitted. Maximum valve lift at determined points by camshaft rotation will be established by the use of low rate substitute valve spring (load characteristics 12lbs at 1.417" and 30lbs at 1.000") with zero tappet clearance. Camshaft duration (profile) and Inlet to Exhaust lobe timing interval may be checked against Ford data, initially by the use of a profile gauge and secondly by an appointed specialist, if deemed necessary.
- k) Maximum valve lift against cam angle with zero tappet clearance (lift measured in mms)

Angle	Inlet		Exhaust	
	Opening	Closing	Opening	Closing
0	10.442	10.442	10.442	10.442
5	10.36	10.36	10.36	10.36
10	10.11	10.11	10.11	10.11
15	9.69	9.69	9.69	9.69
20	9.11	9.11	9.11	9.11
30	7.45	7.45	7.45	7.45
40	5.17	5.17	5.17	5.17
45	3.86	3.86	3.86	3.86
50	2.58	2.59	2.58	2.59
60	.81	.86	.81	.86
70	.43	.54	.43	.54
80	.19	.37	.19	.37
90	.01	.20	.01	.20

- l) It is permitted as a means of repair to replace damaged valve seats and cylinder bores by

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

replacement cast iron valve seat inserts and cast iron cylinder liners. Valve guides may be replaced with cast iron or bronze all to standard dimensions. Holes left by the removal of non-standard external oilways shall be mechanically plugged.

- m) Balancing of reciprocating and rotating parts is permitted only by removal of metal from locations so provided by the manufacturer.
- n) Non-standard rocker covers are permitted provided they in no way improve the performance of the engine.
- o) Standard valve spring retainers shall be used and single valve springs only are permitted. Shims are permitted and valve springs are otherwise free.
- p) Gaskets and seals are unrestricted except for cylinder head gasket, carburettor to inlet manifold gasket and inlet manifold to head gasket which must be dimensionally identical and of a similar type to original Ford gaskets for this engine.
- q) Pump, fan and generator drive pulleys are unrestricted. The crank case breather may be altered or removed but all breathers shall discharge into a catch tank. Mechanical tachometer drives may be fitted.
- r) Localised machining of the cylinder block is permitted to allow fitting of a dry sump system.
- s) In the interest of equality, any car that is suspected to have a power advantage, will, at the discretion of the series scrutineer have its engine sealed and/or undertake performance testing on an SRCC approved rolling road. The SRCC approved rolling road may be a fixed installation or a mobile rolling road, with testing taking place at the circuit. Engines may also be further inspected, by disassembly and/or electronic investigation. If, as a result of this action, the engine is deemed non-conforming, then the provisions of 4.1 'Infringement of Technical Regulations' will apply.

5.7.2 Modifications Prohibited: Any not specifically permitted in 5.7.1. The addition of material by any means to any component is prohibited. Only modifications or additions specifically covered by these regulations are permitted. It is expressly prohibited to install a flywheel other than that designed by Ford for, and fitted to, the 2000cc SOHC 'Pinto' engine as a production item. The flywheel should comply entirely with 5.7.1c). All engine components not covered by these regulations shall remain completely standard and unmodified.

5.7.3 Location: Engine must be mounted upright and aligned fore and aft in the chassis.

5.7.4 Oil/Water cooling: The lubrication system, external to the engine, is free. Existing standard production oilways, linings or oil grooves may be enlarged or reduced, but no additional ones are permitted. Standard friction surfaces must remain unchanged. Dry sump is permitted, oil coolers are free. A liquid cooling system is mandatory but the radiator is unrestricted. The radiator if housed in or incorporating a cowl air scoop deflector shall comply with body regulations. The water pump must stay in the standard Ford position and be belt driven from the engine crankshaft.

5.7.5 Induction System: A single carburettor only will be used on a standard inlet manifold. The carburettor will be a Weber 32/36 DGV 26/27mm venturi. Its origin, being from a 1600 GT Kent or 2000 SOHC 'Pinto' engine. The air cleaner may be removed and a trumpet fitted, and the jets may be changed, both throttles may open together. Cold start devices and diffuser bar may be removed. Internal and external anti-surge pipes may be fitted and seals on emission control carburettors may be removed. No other modifications are permitted. Chokes (Venturi) shall remain standard and no polishing or profiling is permitted. For clarification of permitted carburettor modifications see SRCC Technical Bulletin TB003-11 which is summarised at art. 5.18.1d) Only the standard inlet manifold shall be used. The ports may be reshaped by the removal of metal as long as the following dimensions are maintained: maximum size at head face = 1.437" (36.5mm), maximum size at carburettor flange = 3.405" (86.5mm) x 1.595" (40.5mm). The carburettor seat face may be machined to horizontal in the fore to aft plane. The diameter of the ports may exceed the above listed dimensions if the casting bore is untouched and in its original state. The water passages in the inlet manifold may be plugged. Holes in the inlet manifold resulting from the removal of emission/vacuum lines shall be plugged.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

- 5.7.6 Exhaust systems: Exhaust systems and manifold are unrestricted but must comply with Motorsports UK regulations J5.16.1 to J5.16.6.
- 5.7.7 Ignition System: Distributors are unrestricted providing they retain the original drive and location. The distributor is defined as the component which triggers the LT current and distributes the HT current. The ignition timing may only be varied by vacuum and/or mechanical means. A rev limiter is permitted. No engine management system is permitted. Only ignition systems that use only one trigger, inside the distributor or external, to initiate the low-tension current will be permitted. Any system that requires more than one sensor or input to provide another signal/voltage for any electronic/microprocessor control system will not be permitted.
- 5.7.8 Fuel delivery system: Only the standard mechanical fuel pump for the engine is permitted.

## 5.8 SUSPENSION

- 5.8.1 All cars shall be fitted with sprung suspension between the wheels and the chassis. Suspension must be controlled to avoid fouling of wheels on chassis or bodywork. The springing medium must not consist solely of bolts located through flexible bushes or mountings.
- 5.8.2 All parts shall be of steel or ferrous material with the exception of hubs, hub adapters, hub carriers, uprights, bearings and bushes, bell-cranks, pivot blocks and bushes, spring caps and platforms, abutment nuts and anti-roll bar links. Springs, steel only. It is not permitted to control body roll with additional shock absorbers.
- 5.8.3 SHOCK ABSORBERS: Class A - The shock absorber casing is free. They can be ferrous or light alloy units and separate reservoirs for fluid and/or gas are permitted. Class B - The shock absorber casing shall be steel or other ferrous material (See 5.18.1c). Separate reservoirs for fluid and/or gas are permitted. All Classes - The shock absorber casing is defined as the item which contains the piston, fluid/gas, and moving parts which control the damping action as well as the cylinder closing cap, and the upper and lower mounting eyes/rods. Any form of active damping is prohibited. Any method of altering the damper performance by the driver whilst seated in the car is prohibited
- 5.8.4 Anti-roll bars for front and/or rear suspension may be capable of manual, mechanical adjustment by the driver when seated in the car.
- 5.8.5 Permitted Deviations:  
None
- 5.8.6 Prohibited Modifications:
- Titanium is prohibited.
  - Chromium plating of any steel suspension part is forbidden.
  - Active suspensions are prohibited, as is any system that allows control of the main suspension spring rate, shock absorption and ride height when the car is moving.
  - Multiple adjustable (more than 2 way) shock absorbers are not permitted.

## 5.9 TRANSMISSIONS

- 5.9.1 Permitted Modifications: The gearbox shall include an operable reverse gear capable of being engaged by the driver while normally seated and contain not more than 4 forward gears. The ratios are unrestricted.
- 5.9.2 Prohibited Modifications: The differential cannot be modified in any way to limit its normal



# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

function. Torque biasing, limited slip and lock differentials are prohibited. Excessive shimming of the differential is prohibited. Non-ferrous differential components are prohibited. Electronic assisted gear change mechanisms and electronically controlled differentials are prohibited. The use of automatic and/or sequential gearbox is prohibited.

5.9.3 Transmission & drive ratios: Rear wheel drive only is permitted. Final drive ratio is unrestricted.

## 5.10 ELECTRICS

5.10.1 Exterior Lighting: At least one brake-light of minimum 21 watts rating (or equivalent) and one rear warning light shall be operable and visible from the rear of the car. The rear warning light shall meet the requirements of Motorsports UK regulation [K5.1 & K5.2]. There shall be a minimum gap of 5cm between the brake light and rear warning light, when viewed from the rear of the car.

5.10.2 An onboard battery and driver operated onboard engine self-starter is mandatory.

5.10.3 Generators: Generators are optional.

## 5.11 BRAKES

- a) Only one caliper per wheel is permitted.
- b) A maximum of 4 (four) pistons per caliper are permitted.
- c) Cooling of the calipers shall be by way of direct radiation of heat, from the caliper surface to the airstream.
- d) Ducting to provide airflow to the caliper, created by the forward motion of the car is permitted. All other methods of cooling are prohibited.
- e) The calipers used shall be available to all, and be as shown in the caliper manufacturers' current catalogue.
- f) No other material than iron or steel is permitted for brake discs.

5.11.1 Permitted Modifications:

- a) Class A: The main caliper body material may only be of a homogenous material, i.e. iron, steel or aluminium alloy.
- b) Class A & B: Calipers fitted as original equipment to the cars, but no longer listed as a current product and complying to 5.2 of these regulations, are permitted. The onus of proof shall be with the competitor/entrant.

5.11.2 Prohibited Modifications:

- a) Class B - Light alloy brake calipers are prohibited.

## 5.12 WHEELS/STEERING

5.12.1 Permitted options: Unrestricted apart from 5.12.2 below.

5.12.2 Prohibited options: Rear wheel steering is prohibited.

5.12.3 Construction & materials:

- a) Steering: Material must be metal, with the exception of bushes, seals gaiters and dust covers
- b) Wheels: Material is unrestricted providing it is metal.

5.12.4 Dimensions:

- a) Wheels: 13" diameter wheels with front rim width of 6" and rear rim width of 8" are the only wheel sizes permitted

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

## 5.13 TYRES

5.13.1 Specifications: Radial: Front: 160/520R13 A005 Code N2669 (Slick), 160/520R13 A005 N2701 (Wet). Rear: 200/50VR13 A005 Code N3005 (Slick), 200/50VR13 A006C N2044/N3126 (Wet).  
The use of un-cut wets is prohibited.

5.13.2 Nominated Manufacturers: The only permitted tyres are YOKOHAMA

5.13.3 Proprietary tyre softening compounds and any other similar additive or treatment, designed to improve the performance of the tyre are prohibited. Any competitor found to be in breach of this regulation will be excluded from the championship.

## 5.14 WEIGHTS

5.14.1 Minimum weight must be the weight of the car in the condition at which it crosses the finishing line, or at any time during the competition and/or practice. 506Kg without the driver. No allowance given, for topping-up of fluids.

## 5.15 FUEL TANK

5.15.1 Fuel cells shall be isolated by means of bulkheads and be vented in case of spillage, leakage, or a failure of the cell such that fuel and fumes will not pass into the driver or engine compartment or around any part of the exhaust system. There shall be a liquid tight and fireproof bulkhead separating the fuel tanks from the cockpit. Metal tanks may be used if covered externally with a fireproof coating and are mounted within the main chassis structure.

5.15.2 Locations: Free within Motorsports UK regulations.

5.15.3 Fuel: Only pump fuel as defined in Motorsports UK Regulations Section B Nomenclature and Definitions [see Pump Fuel (a)] may be used. The use of power boosting or octane boosting additives by competitors in any fuel is prohibited.

## 5.16 SILENCING

5.16.1 Specification: As per Motorsports UK regulations [J5.17.1, J5.17.2, J5.17.7, J5.17.8 J5.18.1 to J5.18.5, J5.18.7 to J5.18.11 ].

## 5.17 NUMBERS AND CHAMPIONSHIP DECALS

5.17.1 Competition numbers and backgrounds shall be displayed in accordance with the requirements of the Championship Organisers and Motorsports UK regulations. The numbers and backgrounds shall be of regulation size (see Motorsports UK Yearbook J.4.1) with number backgrounds conforming to the following colours:

Class A: White with black numbers. Class B: Black with white numbers.

SRCC, Yokohama and sponsor decals must be affixed on both sides of the vehicle; failure to comply will render the car ineligible.

5.17.2 Suppliers: Club and sponsor's decals will be available at each round.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS


Issued by: SRCC 07 February 2020

Issue: Published Copy

## 5.18 TECHNICAL APPENDIX

### 5.18.1 TECHNICAL INFORMATION AND DRAWINGS


- | ITEM              | INFORMATION   |
|-------------------|---|
| a) Reference Area | The complete area situated between a vertical and transversal plane 25.8cm forward of the front axle centre-line and a vertical and transversal plane 27.5cm rearward of the rear axle centre-line and across the outside of the front and rear rims. |

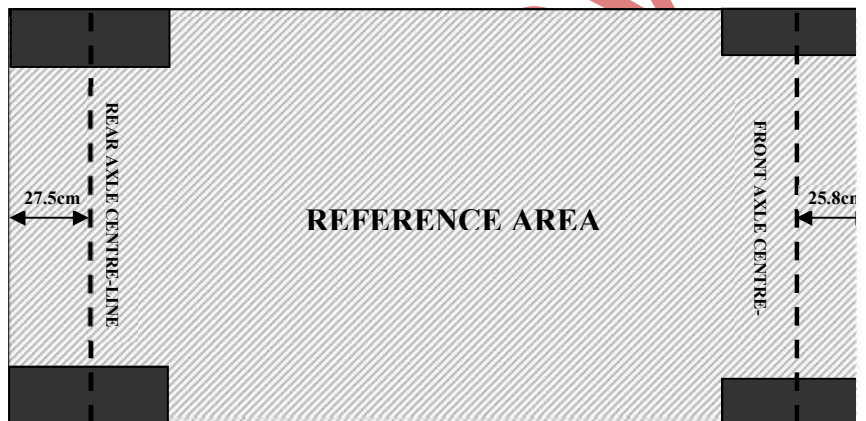

- |                   |  |
|-------------------|--|
| b) Reference Zone | An imaginary rectangular box situated between a vertical and transversal plane 25.8cm forward of the front axle centre-line and a vertical and transversal plane <u>110cm</u> rearward of the rear axle centre-line, across the outside of the front and rear rims and to a height of 25.0cm above the ground plane, with the car at normal ride height. |
|-------------------|--|



- |  |   |
|--|---|
| c) Shock Absorbers Location of Steel or Ferrous Material (Class B & H) | - |
|--|---|

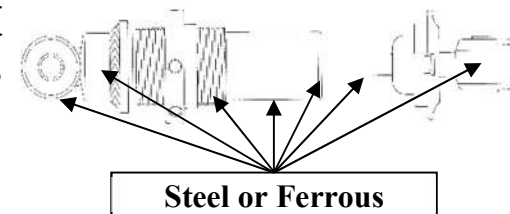

- |                            |  |
|----------------------------|--|
| d) Permitted Modifications | <p>Carburettor 1. It is permissible to modify the external throttle linkage to get a synchronised (both opening together) throttle system but NOT the spindle or throttle butterfly screws themselves. Examples of permitted modifications are found in Actions 2 &amp; 5.</p> <p>2. It is permissible to use the geared type synchronised secondary throttle spindle from a DGAS carburetor as part of this system but it must NOT be modified from its standard ROUND section. This is allowed because the gear and the spindle are integral but modifying it would be classed as profiling.</p> <p>3. Since the throttle plates are thicker on the DGAS unit than the</p> |
|----------------------------|--|

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

DGV it is allowable to shim the gap but only over the clamping area so as not to provide any streamlining of the round throttle spindle. Again standard butterfly screws MUST be used.

4. It is permissible to change the accelerator pump jet to the twin outlet DGAS type since it is permitted to change any jets as stated in Art. No. 5.7.5.
5. It is permissible to use the proprietary kit from Webcon, part number MT009HL which includes the sequential linkage and accelerator pump jet. This fits the standard DGV flat spindles and is easier to fit than the DGAS geared system.

## 6 APPENDICES:

The following Commercial Undertakings are not subject to the Judicial procedures of either the Championship Stewards and/or Motorsport UK/the MSC.

### 6.1 RACE ORGANISING CLUBS & CONTACTS:

Roger Donnan (Club Secretary)  
Sports 2000 Racing Car Club  
12 Friars lane  
Beverley  
East Yorkshire  
HU17 0DF  
Tel: 07538161230

MotorSport Vision Racing  
Brands Hatch Circuit  
Fawkham,  
Kent,  
DA3 8NG  
Tel: 01474 875263

### 6.2 COMMERCIAL UNDERTAKINGS:

Vehicle Presentation: The presentation of the car is fundamental to the profile of the championship/series its sponsors and its audience. Therefore in considering whether to permit any car to race, and any point during the season, the organisers will regard as paramount the presentation of the car. In taking into account its appearance inherent in which is the standard of its presentation (including interior) they may exclude any car, which they consider may prejudice the reputation of the championship/series, or is otherwise unacceptable. This will include where the car is presented at a race event bearing accident damage sustained at a previous event and which has not been subject to the completion of an acceptable repair. Note: A Double Header can be regarded as one event for the purpose of this regulation.

All competitors will park in a neat and tidy manner only in the areas allocated to them by the Race Organisers and will keep these areas clean and tidy at all times. Any competitor failing to obey the instructions of the Organisers or an Official of the Meeting in these matters, in regard to their location, amount of space utilised or manner, in which it is utilised, may be reported to the Clerk of Course who may impose any penalty considered appropriate.

### 6.3. VEHICLE DECALS:

Championship decals must be carried in the positions outlined by the co-ordinator. Further, at all times the Championship sponsors have the right to forbid any decal to be displayed, which is deemed inappropriate.

# SRCC SPORTS 2000 PINTO CHAMPIONSHIP REGULATIONS

Issued by: SRCC 07 February 2020

Issue: Published Copy

## 6.4. PROMOTIONAL ACTIVITIES:

Competitors will be expected to co-operate and participate in such activities if requested.  
Competitors must maintain a standard of appearance and behaviour acceptable to the organisers.

## 6.5. 2020 MEDIA WAIVER:

This race championship is being filmed for television broadcast and as such, permission is required for the television company to record drivers name, likeness, image, voice, sound effects, interview and performance on film, tape, or other media (the "recording") and edit such recording as the producer may desire, incorporate such recording into the television programme, or any versions of the television programme and all related materials thereof, including but not limited to promotion and advertising materials. The producer, and producer's successors and assigns, shall own all rights, title and interests, including the copyright, in and to the television programme, including the recording and related materials used therein. Drivers and Entrant/Drivers automatically agree to this 'media waiver' by completing the championship registration form.

---

## 7 REGISTRATION FORM.

Available as a Download from the website

<https://www.sports2000.co.uk/>

or by contacting the Club Secretary.

Club Secretary: Roger Donnan

Tel: 07538161230

Email: [info@sports2000.co.uk](mailto:info@sports2000.co.uk)