



SRCC SPORTS 2000 DURATEC CHAMPIONSHIP SPORTING & TECHNICAL REGULATIONS 2022



COVER PAGE & DOCUMENT CONTROL

Issue Version:	Published
----------------	-----------

Originator:	SRCC Technical Panel	Date:	24/01/2022
Signed:		Name:	P Streat

Approval:	SRCC Championship Co-Ordinator	Date:	24/01/2022
Signed:		Name:	H Bates

This document is the property of Sports Racing Car Club (SRCC). It contains confidential information and may not be copied, or the information therein divulged to a third party, without the prior written consent of the Club.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP SPORTING & TECHNICAL REGULATIONS 2022

The SRCC Sports 2000 Duratec Championship is for competitors participating in open cockpit 2-seater rear engine sports racing car using standard Ford 2000cc, 16 valve (Duratec DHE 420) engine in its 145PS form.

1. SPORTING REGULATIONS - GENERAL

1.1 TITLE & JURISDICTION:

The SRCC Sports 2000 Championship is organised and administered by the Sports 2000 Racing Car Club, in accordance with the General Regulations of Motorsport UK (incorporating the provisions of the International Sporting Code of the FIA) and these Championship Regulations.

Motorsport UK Championship Permit No: CH2022/R117(D)
Race Status: Interclub
Motorsport UK Championship Grade: C

1.2 OFFICIALS:

1.2.1 Co-ordinator: Heidi Bates, 10 Reeves Close, Whetstone, Leics, LE8 6YQ - 01162752510

1.2.2 Licensed Eligibility Scrutineer: Nigel Thorne 07899 796199

1.2.3 Championship Stewards: Bill Shewan, Brian Hemmings & Mike Dixon

Championship Stewards

(G)2.7. Championship Stewards may only adjudicate on any disputes, irregularities or appeals arising from the approved Championship regulations.

(G)2.7.1. Championship Stewards are also empowered to consider any request from the Championship co-ordinator to penalise any Competitor for any breach of Championship regulations after holding a formal hearing to impose a penalty in accordance with C.2.1.1 (subject to the rights of appeal provided for in Section C).

(W) 2.2.1. The Championship Stewards can only adjudicate upon any disputes, irregularities or appeals arising from the approved Championship Regulations. They are also empowered to consider any request from the Championship Co-ordinator to penalise any Competitor for breach of Championship Regulations and, after holding a formal hearing, to impose a penalty in accordance with C.2.1, subject to the rights of appeal to the MSC provided in Section C.

1.3 COMPETITOR ELIGIBILITY:

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

1.3.1 Entrants must:

- (a) be fully paid up members of the SRCC and
- (b) be Registered for the Championship and
- (c) be in possession of a valid Motorsport UK Entrants Licences.

1.3.2 Drivers and Entrant/Drivers must:

- (a) Be current Members of the SRCC and
- (b) be Registered for the Championship and
- (c) be in possession of valid Competition "Race Club" status Licence, as a minimum
- (d) Or be in possession of the highest grade of national Race licence or valid FIA International Licence, together with their ASN's written consent ((H)26.2. and FIA ISC Article 2.3.7.b applies)
- (e) If participation in the Championship requires absence from education a driver, in full time school education is required to have the approval of their head teacher and a letter stating such approval from their school in order to fulfil registration for the Championship. A driver shall not take time out of their education to participate in motor sport without the prior written approval of their education establishment.

1.3.3 Teams must be in possession of a valid Motorsport UK Entrants licence

A Team shall at all times uphold and respect the provisions of the Code, the General Regulations and these Championship Regulations as may be amended from time to time and shall;

- (a) hold a valid Motorsport UK Entrant licence;
- (b) have at least £5 million Public Liability Insurance;
- (c) uphold the values of the Respect Code and all applicable Motorsport UK policies and guidance;
- (d) act in a professional manner at all times and not act or permit any member of the Team to act in such a manner as to bring motor sport, the Championship or Motorsport UK or any its officers and officials into disrespect;
- (e) adhere to the Motorsport UK Safeguarding Policies and guidance documents, complete Safeguarding training when required and ensure that any person undertaking Regulated Activity is the holder of a valid DBS certificate supplied through Motorsport UK;
- (f) adhere to the General Regulations in respect of anti-alcohol and illicit drugs as well as Motorsport UK processes for anti-alcohol and illicit drugs testing;
- (g) nominate one member of their Team as the Team Representative at each meeting including but not exclusively for the purpose of all judicial proceedings at Events and who shall be present at all judicial proceedings concerning drivers entered under that Team licence in substitution for the driver Parent/Legal Guardian.

1.3.3.1 It is recommended the Team has:

- (a) a designated team member as a 1st 4Sport, Level 2 qualified coach;
- (b) a designated UKAD Certified Advisor. (c) be responsible for carrying out and documenting a risk assessment of their activities; (risk assessment management tool

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

[available\)](#)

- 1.3.4 All necessary documentation must be presented for checking at all rounds when signing-on.

1.4 REGISTRATION:

- 1.4.1 All competitors must register for the championship by returning the Registration Form with the Registration Fee to the Club Secretary prior to the Final Closing date for the first round being entered.
- 1.4.2 The Registration Fee is £ 195 made payable to: SRCC by Cheque or by BACS to
SRCC
Barclays Bank
Sort Code 20-66-51
Account No. 60593923
- 1.4.3 Registration numbers will be the permanent Competition numbers for the Championship.

1.5 CHAMPIONSHIP EVENTS:

The Championship will be contested over 14 rounds (7 events) as follows:

Date	Track /Course/ Venue	Permit Grade	Organiser	Race Length
2/3 April	Donington Park National	Interclub	MSVR	25 mins
2/3 April	Donington Park National	Interclub	MSVR	25 mins
23/24 April	Silverstone National	Interclub	MSVR	25 mins
23/24 April	Silverstone National	Interclub	MSVR	25 mins
21/22 May	Brands Hatch GP	Interclub	MSVR	25 mins
21/22 May	Brands Hatch GP	Interclub	MSVR	25 mins
18/19 June	Snetterton 300	Interclub	MSVR	20 mins
18/19 June	Snetterton 300	Interclub	MSVR	20 mins

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

18/19 June	Snetterton 300	Interclub	MSVR	20 mins
9/10 July	Thruxton	Interclub	BARC	25 mins
9/10 July	Thruxton	Interclub	BARC	25 mins
13 August	Oulton Park International	Interclub	MSVR	50 mins
17/18 September	Brands Hatch Indy	Interclub	MSVR	25 mins
17/18 September	Brands Hatch Indy	Interclub	MSVR	25 mins

1.6 SCORING:

1.6.1 Points will be awarded to Competitors listed as classified finishers in the Final Results as follows: -

- (a) Points will be only be awarded to Championship Registered Competitors listed as classified finishers, in the Final Results as follows: for the Overall Duratec Championship - 1st- 15, 2nd- 12, 3rd- 10, 4th- 9, 5th- 8, 6th- 7, 7th- 6, 8th- 5, 9th- 4, 10th- 3, 11th- 2 points and each additional finisher 1 point.

Fastest lap 1 point

~~1st-15; 2nd-14; 3rd-13; 4th-12; 5th-11; 6th-10; 7th-9; 8th-8; 9th-7; 10th-6; 11th-5; 12th-4; 13th-3; 14th-2; 15th- and all other classified finishers -1 point.~~

For Each Class (A, & B & DB) - 1st- 15, 2nd- 12, 3rd- 10, 4th- 9, 5th- 8, 6th- 7, 7th- 6, 8th- 5, 9th- 4, 10th- 3, 11th- 2 points and each additional finisher 1 point

Fastest lap 1 point.

~~1st-15; 2nd-14; 3rd-13; 4th-12; 5th-11; 6th-10; 7th-9; 8th-8; 9th-7; 10th-6; 11th-5; 12th-4; 13th-3; 14th-2; 15th- and all other classified finishers -1 point.~~

Note: Championship Registered Competitors who qualify but are not classified as a finisher in the Final Results will be awarded 1 point (unless the non-classification is due to the imposition of a penalty). Overall and Class Championships are scored separately.

- (b) Where two Championship Registered Competitors wish to share a car, then provided that the driver combination is registered with the co-ordinator by the close of entries for their first event, points will be awarded to the driver pair, but not individually. They will appear as a joint entry in the Championship Points. No driver substitution is allowed from the original registered combination.

A driver can only be registered in a single combination, a driver cannot be registered in two different combinations in a single season.

Where only one driver from a registered combination competes in a round, any points scored will be allocated to the registered combination.

- (c) Competitors registered as a single entry wishing to share a car with a Guest Competitor in line with 1.6.5 may do so, but will only receive points in line with 1.6.1 for those rounds where the registered competitor drives.

1.6.2 The totals from all qualifying Events run less 2 will determine final championship points and positions.

1.6.3 Ties shall be resolved using the formula in (W)1.3.4. in the current Motorsport UK

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

Yearbook.

- 1.6.4. Where the race distance has been reduced (2.6.) it shall still count as a full points scoring round.
- 1.6.5. Competitors not registered for the Championship may be permitted on an individual round basis and will:
- be deemed "Guest Competitors"
 - not score points and for the purpose of points scoring will be ignored
 - qualify for Event awards
 - comply with the eligibility criteria as prescribed in Article 1.3. above, with the exception of 1.3.1. (b) and 1.3.2. (b), as appropriate.
- 1.6.6. Where a combined race for any of the SRCC Sports 2000 Championships, Duratec, ~~Pinto~~ or Historic, is listed as a Championship Round in the regulations, the following shall apply:
- For Championship Rounds listed as a 'Single Race or Single Standalone Race' there will be a single qualifying session, the grid will be split with the Duratec cars starting in front of the Historic cars and separated by a gap, with the individual ~~single combined grids~~ based on the fastest qualifying times within the relevant ~~irrespective of championship~~. A single results sheet will be published but points will be awarded separately, in accordance with the individual championship regulations to cars competing in the SRCC Sports 2000 Duratec, ~~Pinto~~ and Historic Championships. Thus, the first Duratec car to finish is awarded 15 points, ~~the first Pinto car to finish is awarded 15 points and the first Historic car is awarded 15 points etc. as in 1.6.1.~~
 - For Championship Rounds listed as a 'Double Header' there will be a single qualifying session, the grid will be split with the Duratec cars starting in front of the Historic cars and separated by a gap, with the single individual ~~combined grids~~ based on the fastest qualifying times within the relevant ~~irrespective of championship~~, for race 1. Race 2 grid positions will be determined by the overall finishing order of race 1. For Triple Header events the grid for the first race will be set by the fastest lap time in qualifying. The grid for the second race will be set by the second fastest lap time in qualifying. The grid for the third race will be the finishing order of Race 2. Non-finishers in race 1 or race 2 in a triple header will be allocated grid positions at the back of the relevant grid and in order of non-finishing i.e. the first car to non-finish will be furthest back on the grid. A single results sheet will be published for each race and points will be awarded separately, in accordance with the individual championship regulations to cars competing in the SRCC Sports 2000 Duratec, ~~Pinto~~ and Historic Championships. Thus, in each race, the first Duratec car to finish is awarded 15 points, ~~the first Pinto car to finish is awarded 15 points and the first Historic car is awarded 15 points etc. as in 1.6.1.~~

1.7 AWARDS:

- 1.7.1 All awards are to be provided by the SRC
- 1.7.2 Per Event: Trophies will be awarded by class, on the number of entries per class, as set out below:
- 1 Starter No Trophy
 - 2 to 4 Starters 1st only
 - 5 to 6 Starters 1st and 2nd only

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

Over 7 Starters 1st, 2nd and 3rd

- 1.7.3 Championship: Championship trophy to the overall championship winner (to be retained for one year). Trophies to 1st, 2nd, 3rd in each Class
- 1.7.4 Presentations: Awards will be presented at the end of each event, and/or at the end of the Championship at the designated presentation ceremony
- 1.7.5 Deleted
- 1.7.6 Title to all Trophies: If Provisional Results or Championship Tables are revised after any presentations and these revisions affect the distribution of awards the Competitors concerned must return them to the organisers in good condition within 7 days

2. CHAMPIONSHIP EVENT MEETINGS & RACE PROCEDURES

2.1 ENTRIES:

- 2.1.1 Competitors are responsible for submitting complete entries with the correct entry fee prior to the closing date for entries before each event. Entries are to be submitted via the Motor Sport Vision (MSVR) online entry system. A link to the MSVR entry system will be provided on the SRCC website.
- 2.1.2 Incorrect or incomplete entries (Including Driver to be Nominated Entries) are to be held in abeyance until they are complete and correct and the date of receipt for acceptance of entry purposes shall be the date on which the Meeting Organiser receives the missing or corrected information or fee.
- 2.1.3 Any withdrawal of Entry or Driver/Car changes made after acceptance of any entry must be notified to the Meeting Organisers in writing. D25.1.12. applies.
- 2.1.4 The Entry Fee for each event shall be specified on the online entry form.
- 2.1.5 Reserves will be listed in the Final List of Entries published with Final Instructions or in a Bulletin.

2.2 BRIEFINGS:

Organisers should notify Competitors of the times and locations for all briefings in the Final Instructions for the meetings. Competitors must attend all briefings.

2.3 QUALIFICATION PRACTICE:

- 2.3.1 Should any Practice session be disrupted the Clerk of the Course shall not be obliged to resume or re-run the session; the decision of the Clerk of the Course shall be final.
- 2.3.2. Each driver shall complete a minimum of 3 laps in the car to be raced, and in the correct session, in order to qualify (General Regulations (Q) 12.4).
- 2.3.3 For Double Header events the grid for the first race will be set by the fastest lap time in qualifying. The grid for the second race will be the finishing order of Race 1.
For Triple Header events the grid for the first race will be set by the fastest lap time in qualifying. The grid for the second race will be set by the second fastest lap time in qualifying. The grid for the third race will be the finishing order of Race 2.
- 2.3.4 Where two drivers are sharing car, given the "Single Qualifying" format of double and triple header events, competitors should note that, both drivers should complete three qualifying laps and establish a lap time otherwise the competitor failing to set a time in qualifying will have to start from the back of the grid.

Otherwise grid positions will be set as in 2.3.3

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- 2.3.5 Where competitors share a car, it is their responsibility to notify the Secretary of the Meeting at signing on who will qualify first and who will start each race.

2.4 RACES:

Should any race be disrupted the Clerk of the Course shall not be obliged to resume or rerun the race (Q5.4. Q12.15) (1.6.4. above applies)

- 2.4.1 Pit stops in Enduro format races (Races of 50 minute duration which include a mandatory 2 minute pitstop, allowing a driver change where the car is being shared between 2 drivers).
- a Pit stops will take place in front of each teams allocated pit garage or pit area (the pit box).
 - b During a race requiring a mandatory pit stop this must take place between 20 and 40 minutes of the overall race time, under the responsibility of the team manager. A 'Pit Lane Open' warning sign will be displayed on the start/finish line for the duration of the Pit Lane Open period. The pit stop will be of a controlled minimum duration of 2 minutes. Timing for the pit stop begins when the car triggers the timing loop at the pit lane entry. The stop is considered to be complete when the car triggers the timing loop at the pit lane exit. These points will be indicated by boards in the pit lane indicating the start of the pit lane speed limit and the end of the pit lane speed limit.
 - c No work shall be carried out on the car, until the car comes to a complete standstill and the engine is stopped. The driver may remain in the car, unless refuelling is taking place. The engine must not be restarted until all work is completed and the driver is seated in the car with all the belts done up correctly. Refuelling will be permitted providing Motorsports UK Yearbook regulations (Q) 12.25.1 to 12.25.4 are complied with. The only exception is that closed loop (dry break) refuelling rigs are not permitted. Refuelling must only be carried out at the beginning or end of the pit stop. While refuelling is being carried out, the car must remain on its wheels and no other work carried out on the car.
 - d During the pit stop the maximum number of personnel authorised to work on the car is 4, inclusive of driver(s).
 - e Only one of the authorised personnel is allowed to assist with the driver change/seat belt securing.
 - g Tyre changing is only permitted where a puncture occurs or the tyre/tyres are deemed to have a negative impact on safety. In such cases, the tyre or tyres must be immediately submitted to the Championship Scrutineer (or his appointed deputy) for verification of fact. If a tyre is changed without verification of fact being sought and agreed, a time penalty will be added to the cars overall race time (see art. 4 Championship Race Penalties).
 - h If a driver does not make their mandatory pit stop, or leaves the pits before the correct minimum duration, the driver will have to perform a stop and go penalty (see art. 4 Championship Race Penalties). If it is impossible for this stop and go to take place during the race, a time penalty will be added to the cars overall race time.

2.5 STARTS:

- 2.5.1 All cars will be released to form up on the grid prior to the start in formation as specified on the grid sheet. Where there is a combined Duratec and Historic grid the grid will be split as per 1.6.6.a & 1.6.6.b
- 2.5.2 ~~The start will be via Standing start in Sprint format races and Rolling start in Endurance format races.~~

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

~~The minimum Countdown procedures/audible warnings sequence shall be:-~~

- ~~I. 1 minute to start of Green Flag/Pace Lap – Start Engines/Clear Grid.~~
- ~~II. 30 Seconds – Visible and audible warning for start of Green Flag/Pace Lap.~~
- ~~III. 30 Seconds – Visible and audible warning for start of Green Flag/Pace Lap.~~
- ~~IV. The red lights will be switched on five seconds after the board is withdrawn.~~

- a In Sprint format races the start will be via a Standing start. The countdown procedure and audible warning sequence prior to the start of the race may be commenced in the assembly area but in any event shall be: Signal: Instruction:
- I. 1 minute: Start engines and clear the grid.
 - II. 30 Seconds: Be prepared for the start of Green Flag Lap
 - III. Green Flag: Complete one lap of the circuit and reform into grid positions
 - IV. 5 Seconds: The grid is complete.
 - V. The red lights will be switched on five seconds after the 5 second board is withdrawn and will be extinguished between 2 and 7 seconds later to indicate the start of the Duratec race.
- After a gap of 10 seconds the Start of the Historic race will indicated by the drop of the Union Flag
- b In Enduro format races the start will be via a Rolling start. The countdown procedure and audible warning sequence prior to the start of the race may be commenced in the assembly area but in any event shall be: Signal: Instruction:
- I. 1 minute: Start engines and clear the grid.
 - II. 30 Seconds: Be prepared for the start of Pace Car Lap
 - III. Green Flag: Start of the Pace Car Lap. On the pace car lap, it is the responsibility of the Pole Position Historic car to maintain an approximate 10 second gap between himself and the rear of the Duratec grid.
 - IV. All cars will continue at the speed set by the Safety Car when it enters the Pitlane and both grids will continue in 2x2 formation with no overtaking towards the Start line. The Duratec grid will commence racing when the Red Lights are extinguished at the Start Line and the racing for the Historic grid will commence when the Union Flag is dropped.
- c The start procedure for any race may be varied by the Clerk of the Course in the interests of safety if warranted by the track conditions or unforeseen circumstances. Any such change will be notified via a bulletin issued to all competitors.

- 2.5.3 Any car removed from the grid after the 1 minute stage or driven into the pits on the Green Flag lap shall be held in the pitlane and may start the race after the last car has passed the start line or pit lane exit, whichever is the later to take the start from the grid.
- 2.5.4 Any driver unable to start the Green Flag/Pace lap or start are required to indicate their situation as per General Regulation (Q)12.11.2 In addition any driver unable to maintain grid positions on the Green Flag Lap, to the extent that ALL other cars are ahead of them, may complete the Green Flag lap but MUST remain at the rear of the last row of the grid but ahead of any cars to be started with a time delay.
- 2.5.5. In the event of any starting lights failure the Starter will revert to use of the National Flag.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

2.6 SESSION RED FLAG

Should the need arise to stop any race or practice, RED LIGHTS will be switched on at the Start line and RED FLAGS will be displayed at the Start line and at all Marshals Signalling Points around the Circuit.

This is the signal for all drivers to cease circulating at racing speeds, to slow to a safe and reasonable pace and to return to the pit lane, during practice, and to the starting grid area, during a race, unless otherwise directed by officials.

Cars should not enter the Pits unless directed to do so and all cars in the pit lane during a red flag period must take any restart from the pit exit.

2.7 PITS, PADDOCK & PITLANE SAFETY:

- 2.7.1 Pits & Paddock: Competitors must ensure that the Motorsport UK, Circuit Management and Organising Club Safety Regulations are complied with at all times.
- 2.7.2 Pit lane: The outer lane or lanes are to be kept unobstructed to allow safe passage of cars at all times. The onus shall be on all Drivers to take all due care and respect the pit lane speed limits.
- 2.7.3 Refuelling: May only be carried out in accordance with the General Regulations, the Organising Club Regulations, Circuit Management Regulations and the SRs or Final Instructions issued for each Circuit/Meeting.
- 2.7.4 Speed Limit Pit Lane Speed Limit will be 60kph

2.8 RACE FINISHES:

After taking the Chequered Flag drivers are required to:

- I progressively and safely slow down
- II remain behind any competitors ahead of them,
- III return to the Pit Lane Entrance/Paddock Entrance as instructed,
- IV comply with any directions given by Marshals or Officials
- V keep their helmets on and harnesses done up while on the circuit or in the pitlane.

2.9 RESULTS:

All Practice Timesheets, Grids, Race Results are to be deemed Provisional until all vehicles are released by Scrutineers after Post Practice/Race Scrutineering and/or after completion of any Judicial or Technical Procedures. (General Regulation (D)26.3.)

2.10 TIMING MODULES:

All competitors are required to purchase and fit an approved Electronic Self Identification Module (transponder) to their cars for the purposes of accurate timing. It is the responsibility of the competitor to fit these to car in the position and manner specified by the supplier/timing Company. The Modules must be in place and functioning correctly for

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

all Championship qualifying practice sessions and races.

2.11. DELETED

2.12. OPERATION OF SAFETY CAR

The Safety Car will be brought into operation and run in accordance with Section Q, Appendix 3 of the Motorsport UK General Regulations.

2.13. ONBOARD CAMERAS:

It is mandatory for all cars to have an on-board camera fitted and functioning during every session (see also General Regulations (J) 5.21). It is the driver and/or teams' responsibility to supply and fit the camera. It is the driver and/or teams' responsibility to ensure the camera is switched on and recording before every session that the battery has been charged sufficiently to record the entire session and that there is sufficient memory on the card inserted to record the entire session. A clear forward-facing visual is required, the angle and quality of footage may be inspected at any time. Any party/team that fails to comply may incur a penalty in accordance with Judicial Procedures.

3 SPECIFIC CHAMPIONSHIP REGULATIONS

3.1 [By registering for the Championship all competitors and their associates commit to positively promote and demonstrate the Motorsport UK's Respect Code which is appended to these regulations \(Appendix 1\).](#)

3.1.1 [Where any reports of disrespectful conduct are judged to be well founded the Championship organisers may issue warnings or require remedial actions and/or report the matter to the Championship Stewards who may impose appropriate penalties which can include loss of Championship points and/or race bans through to Championship Expulsion and referral to Motorsport UK.](#)

3.1.2 [It is imperative that we promote the safety and wellbeing of young people and adults at risk. In addition to this all participants must be aware of their behaviour and conduct at all times and abusive language and harmful behaviour will not be tolerated. Any such incidents must be reported to the Championship Coordinator and/or Safeguarding Officer who will also relay the report Motorsport UK. Details of the Motorsport UK Policies and Guidelines are available at \[www.motorsportuk.org/resource-centre\]\(http://www.motorsportuk.org/resource-centre\) by selecting Policies and Guidelines.](#)

3.2 DRIVING STANDARDS - SRCC RACES ARE NON-CONTACT RACES.

3.2.1 You may only move once in front of a car, that is to say you can only move left or right in front of the car, not both.

3.2.2 Pushing or squeezing competitors off the track is strictly forbidden (i.e. reducing the available track width to less than a cars width). If two cars approach a bend together (i.e. side by side), then the car on the racing line cannot chop the corner (i.e. cannot take the racing line) space must be given to the car on the inside. Once the car on the inside is half way alongside (i.e. front wheels level with the driver) then space must be given to that car. Although sports 2000 cars have enclosed wheels the cars must be driven as if they are single seaters. You can go through bends side by side.

3.2.3 Over aggressive driving is also not acceptable and includes such behaviour, but not exclusively, as going for gaps that are not there or are clearly closing, using other competitor's cars as physical brakes or would rather cause a serious accident than be prepared to lift on the throttle or brake especially at the start and first bend.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- 3.2.4 Blinkered vision, driving without the use of mirrors and therefore having no awareness of other cars around you.

4 SPECIFIC CHAMPIONSHIP PENALTIES:

In accordance with Section C of the current Motorsport UK Yearbook

4.1 INFRINGEMENTS OF TECHNICAL REGULATIONS:

- 4.1.1. Arising from post practice Scrutineering or Judicial Action: Minimum Penalty: The provisions of General Regulation: C3.3.

- 4.1.2. Arising from post-race Scrutineering or Judicial Action:
Minimum Penalty: The provisions of General Regulations: C3.5.1 (a) and (b).

For infringements deemed to be of a more serious nature the Clerk of the Course will invoke the provisions of Regulation C3.5.1 (c).

4.2 ADDITIONAL SPECIFIC CHAMPIONSHIP PENALTIES

- 4.2.1 As per current Motorsports UK Judicial Procedure Regulations. If disqualified the driver shall count that event as one of the point scoring rounds counting to his total championship score.

5 TECHNICAL REGULATIONS

5.1 INTRODUCTION:

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

The following Technical regulations are set out in accordance with the Motorsports UK specified format. Vehicles must be in compliance with Motorsports UK General Technical & Safety Regulations as per [J, K & Q] as appropriate. It should be clearly understood that if the following texts do not clearly specify that you can do it you should work on the principle that you cannot. The Eligibility Scrutineer may seal components at any time during the racing season for later inspection. Only cars built from chassis made before July 2001 may deviate from the requirements for driver feet protection of 5.5.7 and a front crash structure specified in 5.5.3. The underlying concept of this production engine formula is the determination that the base engine is to be used as received from Ford without additional performance enhancing work. The club's aim is to keep, the cost of engine preparation and engine performance differentials, to the minimum and will maintain the regulations to this end. Therefore, extensive use of dynamometer time and component matching is not allowed for within the regulations. In this way racing versions of the Duratec DHE 420 engines are to be as similar as if they had come down the Ford production line, where world-wide legislation already requires the power of every engine made, to be within severely defined limits of the homologated power curve. In the event that a performance disparity is noticed with an engine, then that engine may be sealed and power checked at the competitor's expense as per 5.7 m)

- 5.1.1 Scrutineering: The official Motorsports UK Eligibility Scrutineer or his appointed deputy will be attending rounds of the championship and he is available to provide advice as well as ensuring that the regulations are strictly enforced to ensure fair play.
- 5.1.2 To allow for the use of scrutineer's wire seals, certain components must have the heads of 2 adjacent securing bolts or the joint flange in 2 opposite locations, cross-drilled. The cross drilling will leave a through hole of 1.6mm minimum diameter. The components that must be made ready for sealing are: Cam Cover. Differential Side plates. Inlet Manifold (To Head) Throttle Body (To Inlet Manifold). Failure to comply renders the engine ineligible. Motorsports UK Regulation J3.1.5 and J3.1.6 applies. See also 5.1 & 5.7 m)
- 5.1.3 In addition to the requirements to seal engines/gearboxes for eligibility checks, the eligibility scrutineer may request direct access to on-board data logger systems (if fitted) for the purpose of analysis. Any refusal will be seen as a breach of the standards of conduct as per 4.2 2)

5.2 GENERAL DESCRIPTION:

The SRCC Sports 2000 Duratec Championship is for competitors participating in open cockpit 2-seater rear engine sports racing car using standard Ford 2000cc, 16 valve (Duratec DHE 420) engine in its 145PS form. Sports 2000 Duratec is a restricted class. Therefore, any allowable modifications, changes or additions are as stated herein. There are no exceptions. IF IN DOUBT, DON'T. In the interest of clarity, the SRCC will implement an approved Vehicle Identification Paper/Logbook for Duratec Sports 2000 cars. Note that the onus of proof shall be with the competitor/entrant.

- 5.2.1 The Championship will consist of 3 classes:

Class A: For cars manufactured after 31 December 2006 and all cars converted from Pinto specification after 31 December 2012.

Class B: For cars manufactured before 1 January 2007 and all cars converted from Pinto specification, and raced in an SRCC Duratec Championship race before 1 January 2013.

Class DDB (Duratec Derek Bell): For drivers aged 60 or over before the first event of the season.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

5.3 SAFETY REQUIREMENTS:

The following Articles of Motorsports UK Regulations Section K will apply: - K1 to K1.2.5, K1.3.6 to K1.3.8, K1.4.1 to K1.5.2, K1.6.2, K1.6.4, K1.6.5, K 1.6.6, K1.7, K1.8, K2.1, K2.1.3, K2.1.4, K2.1.6 TO K2.1.10, K2.3, ~~K3, K3.1, K3.1.2(a) or K3.1.3, K3.1.6 to K3.5,~~ K3.1 & K3.3, K5.1, K5.2, K6, K7.1 TO K7.4, K8.1, K8.3, K8.5, K9.1 to K9.3, K10.1 TO K10.4, K11.1 to K11.3, K13, K14.1 to K14.3

5.4 GENERAL TECHNICAL REQUIREMENTS & EXCEPTIONS:

5.5 CHASSIS:

- 5.5.1 Unrestricted except that the use of carbon fibre composite structural materials is prohibited. No engine oil or water tubes are permitted within the cockpit. The engine will be mounted upright and aligned fore and aft in the chassis.
- 5.5.2 It is the intent of these rules to minimise the use of ground effects to achieve aerodynamic down force on the vehicle.
- i) The chassis and body surfaces, which comprise the underside of the car, shall not deviate from a flat plane by more than 2.5cm or 1". This deviation may not be used to create an aerodynamic device.
 - ii) The underside of the car is defined as being within the reference area as per 5.18.3 d)
 - iii) The underside of the car (Z0 plane) must incorporate a rectangular rigid surface of minimum 142.24cm measured across the vehicle by minimum 91.44cm measured along the longitudinal axis of the vehicle, which must extend to the full width of the body.
 - iv) There must be no aerodynamic devices that are considered 'downforce generating' situated in the reference zone defined in 5.18.3 e)
- 5.5.3 The chassis must include an impact-absorbing structure ahead of the front bulkhead of the main structure. This structure must be solidly fixed to the extremities of the bulkhead (i.e. with at least 6 bolts of high quality steel of 6mm minimum core diameter requiring tools for removal). Or it may form part of the chassis structure. It must constitute a box of 30cm minimum length, 15cm minimum rearward height and 400cm² minimum total cross section. The construction material must be metallic and it must be designed to give protection to the driver by way of calculated deformation and controlled deceleration in the event of an impact. The manufacturer may be asked to supply information to the eligibility scrutineer (or his representative) to confirm the design calculation and/or any impact testing carried out by an approved test facility. Irrespective of the size of the impact absorbing structure (safety foot box), the maximum total area of access holes allowed in this structure shall be 300 cm². The basic structure is defined as a unit with 5 closed sides, and 1 open side. The access holes dimension quoted apply to any modification to the 5 closed sides.
- 5.5.4 *There must be no stressed part (centre spine/chassis divider/stiffening panel) in the longitudinal section of the chassis structure, between the steering wheel and the seat back and inside of the driver/passenger space that exceeds in height, 30cm (11.8") above the lowest point of the chassis, with the exception of the requirements of driver lateral head restraint (5.5.5). (The lowest point of the chassis is described as the underside of the chassis/ZO plane)*
- 5.5.5 *It is permitted to fit, between the driver/passenger space, a central removable longitudinal support, maximum cross section 750mm² only for the purpose of supporting a lateral head restraint. This support must be removable without the use of tools so as not to hinder driver egress.*

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- 5.5.6 Space for 2 seats shall be provided each of at least 40cm (15.75") width and shall be positioned symmetrically about the vehicle's longitudinal axis. There shall be at least 25cm (9.9") wide foot space for the driver measured at the pedals. The passenger space should provide as much seat space, elbowroom, foot and legroom in terms of length, width and height as that of the driver space. Battery boxes and fire extinguishers are permitted in the passenger seat area.
- 5.5.7 The soles of the feet of the driver, seated in the normal driving position and with his feet on the pedals in the inoperative position, shall not be situated to the fore of a vertical plane passing through the centre line of the front wheels.

5.6 BODYWORK INCLUDING AEROFOILS AND SPOILERS.

- i) The body shall provide a cockpit for 2 seats and cover all mechanical components including wheels and suspension members except for the exhaust pipe, induction system and camshaft cover which may protrude through the engine cover.
- ii) *Forward of the main roll bar the bodywork must not allow mechanical components to be seen when viewed from any orthogonal direction relative to the chassis major X, Y & Z axes. The exception to this would be any part visible through apertures in the road wheel.*
- iii) The bodywork shall project over the complete wheels in such a way as to cover at least one third of their circumference and their entire width. Reference Motorsports UK Regulation [J5.2.6]
- iv) Between the front and rear axle lines the body shall:
 - a) Maintain over a minimum of 70% of the length of the wheelbase a minimum vertical height (measured from the lowest point of the chassis), of 20cm (7.9") when viewed from the side, and when viewed from above, a minimum body width exceeding the greatest overall width across the tyres less 15cm (5.9").
 - b) There shall be no gap between the main body and the wheel arches.
 - c) The bodywork forward of the main rollbar must be symmetrical about the car's longitudinal centre-line. An exception is allowed whereby a cockpit air deflector/windscreen is permitted. Additionally, within the context of this sub-section, any cooling radiator is not considered as part of the bodywork.
- iii) The cockpit opening seen in plan view shall be symmetrical about the longitudinal axis of the car and shall be large enough for a horizontal rectangle of 80cm (31.5") by 40cm (15.75") to be passed through with its minor axis aligned with the vehicle's longitudinal axis. Any driver head restraint fitted which is wholly removable without the use of tools, may be so removed before the application of the cockpit opening template.
- iv) All ducted air for heat exchangers (water/oil) and brakes shall pass through those heat exchangers or onto those brakes.
- v) Maximum vehicle length forward of the front axle centreline: 91.5cm (36") (including spoilers), the maximum vehicle length rearward of the rear axle centreline: 110cm (43.3") (including spoilers)
- vi) Spoilers mounted at the front of the vehicle are permitted. Those spoilers may only be adjusted in a horizontal plane.
- vii) Spoilers mounted at the rear of the vehicle are permitted. Those spoilers may only be adjusted in a plane that is vertical or $\pm 20^\circ$ of vertical.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- viii) A rear elevated aerofoil (wing) in the form of SRCC authorised Part number: SRCC-RA1, defined in 5.18.2. must be fitted to all cars.
- a. The elevated aerofoil (wing) including any end plates, must be mounted so as not to exceed a height of 110cm (43.3") from the ground, measured with driver on board. No part of the wing, wing end plates or mountings shall extend longitudinally rearwards from the rear axle centre-line by more than 110cm (as per Motorsports UK Regulation [J5.2.7]).
 - b. The wing support shall be mounted to the gearbox and/or sprung chassis in such a manner as to avoid flexing at speed.
 - c. Wings may be mounted to the bodywork providing there is a metal support structure directly below the mounting points sufficient to carry the loads to the gearbox/sprung chassis. A positive retention system is required on both wing-mounting struts to keep the wing attached to the metal mounting structure in the case of bodywork damage/failure.
 - d. No more than 1° of deflection shall occur when a 10 foot-pound torque is imposed on the wing at 6.35cm (2.5") from the leading edge.
 - e. A Gurney flap, not to exceed 1.9cm (.75") in height may be fitted to the top trailing edge of the wing and mounted at 85° to 95° relative to the local wing surface.
 - f. End plates may be attached to the wing. These end plates, when viewed from above, must fit within a box, which is 2.54cm (1") wide laterally, and 35.5cm (14") long front to back, and must not exceed the maximum bodywork width of the car. Where these end plates are mounted to the bodywork and wing together, any gap between the inner face of the end plate and the outer face (longitudinal) of the wing may be bridged either with round section spacers of not more than 15mm diameter or flat plates of maximum thickness 3mm. The plates must not exceed the end plate length (front to back) and must always be mounted to present the minimum profile when viewed from the front of the car. In other words the plates must be at 0 degrees to the ground plane.
- ix) Windscreens are optional.

5.6.1 Modifications Permitted:

1. General: None in contravention of 5.6.2 below.
2. Interior: None in contravention of 5.6.2 below.
3. Exterior: Spoilers mounted at the rear of the vehicle may include a gurney lip/stiffening fold not exceeding 10mm when viewed from above.
4. Silhouette: None in contravention of 5.6.2 below.
5. Ground Clearance: Cars must comply with Motorsports UK regulation [J5.20.11].

5.6.2 Modifications Prohibited:

1. General: The body above the chassis level in the region of the cockpit shall not be reinforced in any way that would complicate or hinder the rescue of the driver.
2. Interior: No engine oil or water tubes are permitted within the cockpit.
3. Exterior: Spoilers shall not contravene the maximum vehicle length as defined in 5.6.v) of these regulations, at any time. No bodywork/diffuser extension of the underside panel or

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

support structure for the floor that may be considered to aid down force, is allowed between the inside faces of the rear wheels from a vertical plane connecting the rear wheel centre points (see 5.18.3.c), to the rear extremity of the car.

4. Silhouette: Maximum height with driver on board excluding rear elevated aerofoil (wing), safety rollover bar and mirrors shall not exceed at any time 90cm (35.4") measured from the ground.
5. Ground Clearance: See 5.6.1.5 above

5.7 ENGINE

Ford 2000cc, 16 Valve (Duratec DHE 420) engine in its 145PS form

- a) The supply source of base engines is open, however, regardless of supplier, all elements of the regulations apply and it is the responsibility of the driver and/or entrant to ensure legality of the engine as used in qualifying and racing. Eligible base engines are identified by the following 4 letter codes: AODA, AODB, AODE, SYDA, CJBA, CJBB, AOBA & AOBC. The location of the codes is shown at art 5.18.2 f)
- b) Engines will be mounted upright, and aligned fore and aft in the chassis.
- c) The addition of any material, be it metal, plastic, or composite etc. by any means be it welding, bonding, encapsulation or encasement to any component is prohibited. However, specific repair of the mounting points of the cylinder block to the transmission or chassis is allowed, whilst other casting repairs may be allowed with prior written approval of the Eligibility Scrutineer responsible for the Formula.
- d) Water pump and generator drive pulleys and their retention bolts, washers and belts are free.
- e) Mechanical tachometer drives may be fitted.
- f) The use of non-standard replacement fasteners, nuts, bolts, screws, studs and washers which are not connected with, or which do not support, any moving parts of the engine or its compulsorily retained accessories is permitted. Freedom granted to any fastener does not allow for freedom to move items relative to each other. For components that are granted the freedom for the fitment of a key or dowel, then material may be removed to allow the fitting of the key or dowel. Only one hole or keyway per component is allowed.
- g) The use of thread locking compounds is permitted.
- h) Gaskets are free except for the cylinder head, intake and exhaust system gaskets which must be standard Ford manufacture for the engine.
- i) Any process of cleaning may be used on any component providing the surface finish, which must remain standard, is not affected.
- j) Forced induction is prohibited. Ram air effects generated by the forward motion of the car is not considered as forced induction.
- k) The expression "Standard", "Standard production" or similar expression is deemed to imply that the part has been manufactured by Ford, or a Ford Motor Company Ltd. authorised sub-contractor, for specific use on a specific model of the vehicle or engine. Consequently for these rules only parts manufactured specifically for the Ford 2000cc, 16 Valve engine (Duratec DHE

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

420) in its 145PS form, may be used. Any machining marks on cast components resulting from manufacturing procedures will not cause disqualification. Only machining and component preparation carried out by Ford Motor Company Ltd., or by a Ford Motor Company Ltd. authorised sub-contractor is allowed unless otherwise specified. Any production deburring or imperfection removal during initial manufacture may not be modified or extended. The Scrutineers decision will be final (based on advice from Ford Manufacturing) if a dispute arises regarding the amount of tool, or other marks that are evident in any particular component.

- l) The exterior surfaces only (of the complete engine assembly) of ferrous parts and the exterior surface of the aluminium cam cover may be protected by paint or similar means. No internal component or surface may be coated by any protective finish. Other Ford produced aluminium components may be protected only on their external surfaces by a transparent clear varnish, or similar. No rework may be carried out on any component unless specifically authorised by the regulations. The engine and associated parts must remain exactly as produced by the Ford Motor Company unless expressly detailed in these regulations. If the regulation allows a change, then that authorisation would allow the change to be carried out. However any statement defining minimum weight or dimensions does not grant permission for rework to obtain these minimum values, unless carried out in accordance with these regulations. Only Ford standard parts (parts manufactured by Ford or a Ford Motor Company authorised sub-contractor) specifically for the 2000cc, 145PS version of the Duratec DHE 420 engine can be used in this series. No treatment that alters in any way the surface finish, hardness, or other property of the original production component is allowed. The only exception to this is any deposit derived from the lubrication and combustion processes naturally occurring during the running of the engine. Ford reserve the right to prohibit the use of specific components introduced as Production changes, if in the opinion of the Ford Motor Company Limited, they are deemed to have a performance advantage. If in doubt contact Ford Motorsport or the series scrutineer.
- m) In the interest of equality, any car that is suspected to have a power advantage, will, at the discretion of the series scrutineer have its engine sealed and/or undertake performance testing on an SRCC approved rolling road. The SRCC approved rolling road may be a fixed installation or a mobile rolling road, with testing taking place at the circuit. Engines may also be further inspected, by disassembly and/or electronic investigation. If, as a result of this action, the engine is deemed non-conforming, then the provisions of 4.1 'Infringement of Technical Regulations' will apply.

5.7.1 Modifications Permitted:

- a) Engine. The only permitted engine is the Ford 2000cc, 16 Valve (Duratec DHE 420) engine in its 145PS form with nominal bore 87.5mm and stroke 83.1mm. Production tolerances are permitted providing the total swept volume does not exceed 2000cc
- b) Inlet Manifold. The only permitted manifold is SRCC - IM1, defined in 5.18.2. It is not permissible to reshape the manifold internally. The manifold may be machined externally. No spacer or gasket shall be used between the inlet manifold and cylinder head apart from the standard Ford gasket as per 5.7h)
- c) Throttle Bodies: The throttle bodies SRCC-TB1 are defined in 5.18.2. The Throttle body housings shall not be modified internally in any way or by any means. No spacer or gasket shall be used between the throttle body and inlet manifold. Sealing shall be effected by way of the 'O' rings supplied with the Throttle Bodies' The external throttle linkage is free. No other modifications are permitted. Any means of reducing intake air temperature is prohibited. Any form of water injection is prohibited.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- d) **Air Horns:** The Air Horns SRCC-AH1 are defined in 5.18.2. The Air Horns shall not be modified in any way. They shall fit directly to the Throttle Body. It is permissible to mount an airbox base plate between the Throttle Body and the Air Horn. Any such base plate shall not exceed 5mm in thickness. No other gaskets or spacers are permitted
- e) **Fuel Injectors:** The fuel injectors are defined in 5.18.2. No modifications are permitted.
- f) **Fuel Injection and Engine management system:** The main engine "Electronic Control Unit" (ECU) shall not be modified in any way. It is not permitted to change the strength or form of any of the sensor signals to, or the outputs from, the ECU or the ignition amplifier unit. The only ECU's allowed are defined in 5.18.2. The ECU, and the electronics diagnostic connector, must be positioned in an accessible position, allowing scrutineers free access to it at all times. The engine high-pressure fuel pump(s), and any low-pressure pump(s) must be activated through a relay (Minimum 15 Amp capacity) triggered from the 'Fuel pump relay' pin on the main engine ECU. It is permissible to fit a crankshaft speed sensor if an engine speed signal is not taken from the engine management system for extra instrumentation. The engine ECU and/or ignition amplifier may be exchanged, or electronically interrogated at any time (including the time allocated for practice) upon the request of a designated official from the event organisers and/or the SRCC. The event scrutineers reserve the right to require a competitor to carry an SRCC supplied data logger on the car at any time during the event. The unit to be placed close to the existing diagnostic connector.

5.7.2 **Exhaust systems:** Exhaust systems and manifold are unrestricted but must comply with Motorsports UK regulations J5.16.1 to J5.16.6.

5.7.3 Cylinder Block

- a) It is permitted, as means of repair, to replace cylinder bores with cast iron cylinder liners, in standard material and to standard dimensions. The liners must remain dry liners. The centre line of the cylinder bores must remain within Ford production tolerance. No offsetting of the cylinder bores is allowed. 'Nicasil' or any other types of bore plating / treatments are prohibited.
- b) Localised machining of the cylinder block is permitted to allow fitting of the dry sump system.
- c) The crankcase breather may be modified, including removal, as long as no air and/or oil escape from this area other than through pipework to a catch tank.
- d) The cylinder block may be machined to maintain deck height whilst respecting 5.7.5 a) iii)

5.7.4 Cylinder Head Including Valves and Valve Gear:

- a) It is permitted, as means of repair, to replace damaged valve guides and valve seats by replacement valve guides and valve seat inserts all to standard dimensions.
- b) No work, which removes, adds, replaces, or transfers material is allowed on the cylinder head with the following exceptions.
 - i) Simple cleaning which does not alter in any way the shape of the component.
 - ii) Minimal material removal from the head face to correct combustion chamber volume and/or reclaim head flatness. No internal rework of any combustion chamber is permitted.
 - iii) Fitting of replacement valve seat insert to a position that replicates the standard closed valve position.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- c) The cam cover assembly cannot be modified or replaced.
- d) All valve train components, other than the valve springs and simple shims under valve springs, may not be modified or replaced. The replacement tappets from Ford are permitted to accommodate valve train wear, but cannot be modified in any way unless to adjust lash length within the standard Ford range. Valve springs are free.
- e) Valves must remain standard, no re-profiling or polishing is permitted. The original 45 degrees (90 degrees included) seat angle must be maintained.
 - Distance apart at centres (inlet) 37.25+ 0.5 mm.
 - Distance apart at centres (exhaust) 36.00+ 0.5 mm.
 - Maximum face diameter (inlet) 35.15 mm.
 - Maximum face diameter (exhaust) 30.15 mm.
 - Overall length (inlet) 103.85 + 0.5 mm.
 - Overall length (exhaust) 105.05 + 0.5 mm.
 - Standard valve stem seals must be retained.
- f) Valve seat dimensions shall remain standard.

5.7.5 Compression Ratio

- a) The maximum compression ratio will be controlled as follows:
 - i) Minimum combustion volume in the cylinder head (with the race spark plug fitted) = 42cc.
 - ii) Standard Ford cylinder head gasket with a minimum compressed thickness of 0.45 mm, and a minimum diameter of cylinder aperture of 89.00 mm.
 - iii) With the piston at Top Dead Centre, the piston top must remain below the top of the block (deck) by a minimum of 0.375mm (0.015"). The measurement shall be taken from the flat squish deck of the piston (not the concave bowl), to the deck height (top) of the block, without fitment of a head gasket. This measurement shall be taken in 2 positions at the extreme fore and aft of the piston in line with the piston pin. An average of the 2 measurements will be used to determine the actual dimension.
 - iv) The combustion chamber cannot be cleaned of carbon prior to a compression ratio check being undertaken. However, if the measured compression ratio is outside of tolerance, the eligibility scrutineer, at his discretion may allow the combustion chamber and/or piston crown to be de-carbonized in a controlled manner, prior to re-test and calculation. In all cases, this second measurement will be taken and recorded as final.

5.7.6 Camshaft

- a) The only permitted camshaft is the standard production camshaft (Part No's:- Inlet 1S7G-6A271-BG; & Exhaust 1S7G-6A272-BG - or subsequent production camshafts conforming to the standard lift data.
- b) The camshaft must remain entirely unmodified. It must be fully manufactured and ground by the Ford Motor Company. It is prohibited to grind from blanks, regrind or re-profile. Only the production surface finish is permitted. Shot peening, shot blasting or polishing are prohibited. It is prohibited to modify the timing slots in the cam ends.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- c) The cam profile is defined by determination of lift against a flat-footed follower at various angles. The angular setting of the camshafts is to be set according to 5.18.3

5.7.7 Pistons

- a) Pistons must be standard production pistons (Part No. 1S7G-6110-DE1), unmodified in any way.
- b) All three piston rings must be fitted and piston rings must be standard production items. The minimum weight of the connecting rod and piston assembly shall be 910 gms. (Complete piston with rings and pin, connecting rod and cap with bolts but excluding crankshaft bearings).
- c) The piston cooling oil squirt jets, and the oil feed galleries to them, must be retained and unmodified in any way.

5.7.8 Connecting Rods

Connecting rods must be standard (Ford Part No. 1S7G-6200-AG) unmodified in any way. Polishing is prohibited. The minimum weight of the connecting rod and piston assembly shall be 910gms. (Complete piston with rings and pin, and connecting rod and cap with bolts but excluding crankshaft bearings). Connecting-rod bolts are free.

5.7.9 Crankshaft

- a) A standard crankshaft must be used. Polishing is prohibited. Crankshaft minimum weight is 13.6kg (including gearbox spigot bearing). Crankshaft journals must remain within Ford positional tolerances if a repair regrind is carried out.
- b) Crankshaft pulley and damper must be retained. Additional drives to oil pump, alternator etc. may use this pulley, or extra pulleys mounted in front of the crankshaft damper.
- c) It is not permitted to alter the number of bearings or fit bearings of less than standard production width
- d) The crank journals may be reground for reclaim, as long as the minimum crank weight is respected. Standard oversize and undersize bearings are permitted.
- e) The crankshaft timing chain sprocket and front pulley/damper may be fixed to the crankshaft by woodruff key or dowel.

5.7.10 Flywheel and Clutch

- a) The flywheel assembly (steel flywheel and ring-gear) must conform to a minimum weight, accept the mandatory clutch assembly and maintain the same outside diameter of the original equipment (including ring-gear) fitted to the Ford 2000cc, 16 Valve (Duratec DHE 420) engine in its 145PS form. For rectification the clutch mating face may be resurfaced provided the minimum weight is respected. No other machining is allowed. It is mandatory to use AP clutch cover plate CP5905-1 or CP5905-500 with AP clutch driven plate CP5352, CP5351 or CP5354 (see 5.18.2). It is permitted to alter the clutch spline to suit the gearbox. Racing clutches are prohibited
- b) Flywheel bolts are free and locating dowels are permitted.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- c) It is permitted to secure the starter ring to the flywheel.
- d) Flywheel minimum permitted weight = 4.6kg (excluding all flywheel and crankshaft mounting bolts). Flywheel, Clutch Cover plate and driven plate minimum permitted weight = 10.1kg (excluding all flywheel mounting, crankshaft mounting and clutch cover bolts).

5.7.11 Lubrication System

- a) The lubrication system, external to the engine, is free. Existing standard production oilways, linings or oil grooves may be enlarged, but no additional ones are permitted. Addition of material to facilitate an increase in oilway size is not permitted, with the exception that the oil lines to the standard oil pump may be modified by the addition of material to allow its use with the free concept dry sump system. Standard bearings (production or production reclaim sizes) must be retained and cannot be modified. Chamfering of the entry/exit holes of oilways is permitted. A dry sump system is mandatory, oil coolers are free. No part of the dry sump equipment may protrude inside the engine cylinder block. The standard engine pressure oil pump may be modified or removed.
- b) No line containing lubricating oil may pass through the cockpit. All lubricating oil lines, which carry oil at a nominal pressure of 1 bar or above, must have a minimum burst pressure of 70 bar (1000psi) and a minimum operating temperature limit of 135°C (250°F). When flexible, these lines must have threaded connectors and an outer braid resistant to abrasion and flame (will not sustain combustion). All other oil and oil vapour containing lines must be made from hose material and fittings that meet the minimum operating temperatures stated above, and have adequate burst strength.

5.7.12 Cooling System

- a) A liquid cooling system is mandatory. The standard production water pump must be retained, although through freedom on the drive to the pump, its rotational speed may be changed. The radiator and associated pipes are free.
- b) The water thermostat housing is free, unused car heater connections must be blanked off. It may however be repositioned by the fitment of an extension pipe from the original location to a revised location. The thermostat is free. If the thermostat is removed then the water recirculation pipe should also be blanked off. However if one is fitted it must conform to the following:- The standard production thermostat, or another twin seat thermostat unit working in the same manner as the standard part, but which controls the hot engine water coolant temperature above 70°C only are permitted. The car water circulation concept must be retained, and NO water bypass pipes or air bleed pipes are allowed which interfere with the design principle of the production thermostat. It is strongly recommended that the thermostat is retained when racing in cool conditions.
- c) The radiator, if housed in or incorporating a cool air scoop or deflector, must comply with bodywork regulations.

5.7.13 Fuel System

- a) A high-pressure fuel pump and fuel filter assembly (maximum volume 0.5 litre) must be mounted within the area defined by the chassis rails and not directly in the cockpit area.
- b) The fuel pressure in the engine fuel injector rail is free.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

- c) It is permitted to fit a low-pressure fuel pump and fuel collector (maximum volume 1 litre) prior to the high-pressure fuel pump. This must be mounted within the area defined by the chassis rails and not directly in the cockpit area.
- d) The fuel rail is free.
- e) All lines containing petroleum spirit must be fitted in such a way that any leakage cannot result in the accumulation of fluid in the cockpit. When flexible, all high-pressure lines must have threaded connectors and an outer braid, which is resistant to abrasion and flame. All high-pressure fuel lines must have a minimum burst pressure of 41 bar at the minimum operating temperature limit of 135 degrees centigrade. To facilitate the repeated fitting of screwed connectors for the aluminium fuel rail it will be permitted to have short adaptor hoses (to the same specification) between the engine and chassis system. Fuel cooling radiators are permitted, within safety regulations, but must be mounted within the main chassis frame. Fuel cooling may only employ air at ambient temperature as the cooling medium, and fan assistance is not allowed.

5.7.14 Electrical System

- a) Sparking plugs are free, provided they fit the engine without any modification to the cylinder head or the sparking plug and that the sparking plugs place the spark gap in the same position as the production sparking plug within the combustion chamber.
- b) The coil unit may be repositioned, but the existing HT leads to the sparking plugs must be retained without modification.
- c) It is prohibited to use any other method or component to trigger, distribute or time the ignition or injection.
- d) The engine management wiring loom is free. Any loom used must not alter the normal electrical characteristics of the inputs, outputs or sensors in any way.
- e) A 12 Volt (nominal) alternator must be fitted. The alternator may be driven from either the engine or transmission. The alternator shall at all times provide an output capable of maintaining a correct level of charge in the storage battery. The installation shall ensure that this output is available at all times whilst the car is circulating on the racetrack.

5.8 SUSPENSION

- 5.8.1 All cars shall be fitted with sprung suspension between the wheels and the chassis. Suspension must be controlled to avoid fouling of wheels on chassis or bodywork. The springing medium must not consist solely of bolts located through flexible bushes or mountings.
- 5.8.2 All parts shall be of steel or ferrous material with the exception of hubs, hub adapters, hub carriers, uprights, bearings and bushes, bell-cranks, pivot blocks and bushes, spring caps, abutment nuts and anti-roll bar links. Springs, steel only. It is not permitted to control body roll with additional shock absorbers.
- 5.8.3 The shock absorber casing is free. They can be ferrous or light alloy units and separate reservoirs for fluid and/or gas are permitted. The shock absorber casing is defined as the item which contains the piston, fluid/gas, and moving parts which control the damping action. Any form of active damping is prohibited. Any method of altering the damper performance by the driver whilst seated in the car is prohibited.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

5.8.4 Anti-roll bars for front and/or rear suspension may be capable of manual, mechanical adjustment by the driver when seated in the car.

5.8.5 Permitted Deviations:

None

5.8.6 Prohibited Modifications:

- a) Titanium is prohibited.
- b) Chromium plating of any steel suspension part is forbidden.
- c) Active suspensions are prohibited, as is any system that allows control of the main suspension spring rate, shock absorption and ride height when the car is moving.
- d) Multiple adjustable (more than 2 way) shock absorbers are not permitted.

5.9 TRANSMISSIONS

5.9.1 Permitted Modifications:

- a) Rear wheel drive only is permitted.
- b) The gearbox shall include an operable reverse gear capable of being engaged by the driver while normally seated and contain not more than 5 forward gears.
- c) The gear ratios and final drive ratio are unrestricted.

5.9.2 Prohibited Modifications:

- a) The differential cannot be modified in any way to limit its normal function.
- b) Torque biasing, limited slip and locked differentials are prohibited.
- c) Excessive shimming of the differential is prohibited.
- d) Non-ferrous differential components are prohibited.
- e) Electronic assisted gear change mechanisms, paddle change systems and electronically controlled differentials are prohibited.
- f) The use of automatic gearbox/gearbox operation is prohibited.
- g) Any method of providing traction and/or launch control, however derived (apart from direct driver input), is prohibited.

5.10 ELECTRICS

5.10.1 Exterior Lighting: At least one brake-light of minimum 21 watts rating (or equivalent) and one rear warning light shall be operable and visible from the rear of the car. The rear warning light shall

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

meet the requirements of Motorsports UK regulation [K5.1 & K5.2]. There shall be a minimum gap of 5cm between the brake light and rear warning light, when viewed from the rear of the car.

5.10.2 An onboard battery and driver operated onboard engine self-starter is mandatory.

5.11 BRAKES

- a) Only one caliper per wheel is permitted.
- b) A maximum of 4 (four) pistons per caliper are permitted.
- c) Cooling of the calipers shall be by way of direct radiation of heat, from the caliper surface to the airstream.
- d) Ducting to provide airflow to the caliper, created by the forward motion of the car is permitted. All other methods of cooling are prohibited.
- e) The calipers used shall be available to all, and be as shown in the caliper manufacturer's current catalogue.
- f) The main caliper body material may only be of a homogenous material, i.e. iron, steel or aluminium alloy.

5.11.1 Permitted Modifications:

None

5.11.2 Prohibited Modifications:

No other material than iron or steel is permitted for brake discs.

5.12 WHEELS/STEERING

5.12.1 Permitted options:

Unrestricted apart from 5.12.2 below.

5.12.2 Prohibited options:

Rear wheel steering is prohibited.

5.12.3 Construction & materials:

- a) Steering: Material must be metal, with the exception of bushes, seals gaiters and dust covers
- b) Wheels: Material is unrestricted providing it is metal.

5.12.4 Dimensions:

- a) Wheels: 13" diameter wheels with front rim width of 6" and rear rim width of 8" are the only wheel sizes permitted

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

5.13 TYRES

5.13.1 Specifications: Radial: Front: 160/520R13 A005 Code N2669 (Slick), 160/520R13 A005 N2701 (Wet). Rear: 200/50VR13 A005 Code N3005 (Slick), 200/50VR13 A006C N2044/N3126 (Wet). The use of un-cut wets is prohibited.

5.13.2 Nominated Manufacturers: The only permitted tyres are YOKOHAMA

5.13.3 Proprietary Tyre Softening compounds and any other similar additive or treatment, designed to improve the performance of the tyre are prohibited. Any competitor found to be in breach of this regulation will be excluded from the championship.

5.14 WEIGHTS

5.14.1 Minimum weight must be the weight of the car in the condition at which it crosses the finishing line, or at any time during the competition and/or practice. ~~521~~530Kg without the driver. No allowance given for topping-up of fluids

5.15 FUEL TANK

5.15.1 Fuel cells shall be isolated by means of bulkheads and be vented in case of spillage, leakage, or a failure of the cell such that fuel and fumes will not pass into the driver or engine compartment or around any part of the exhaust system. There shall be a liquid tight and fireproof bulkhead separating the fuel tanks from the cockpit. Metal tanks may be used if covered externally with a fireproof coating and are mounted within the main chassis structure.

5.15.2 Locations: Free within Motorsports UK regulations.

5.15.3 Fuel: Only pump fuel as defined in Motorsports UK Regulations Section B Nomenclature and Definitions [see Pump Fuel (a)] may be used. The use of power boosting or octane boosting additives by competitors in any fuel is prohibited.

5.16 SILENCING

5.16.1 Specification: As per Motorsports UK regulations [J5.17.1, J5.17.2, J5.17.7, J5.17.8 J5.18.1 to J5.18.5, J5.18.7 to J5.18.11].

5.17 NUMBERS AND CHAMPIONSHIP DECALS

5.17.1 Competition numbers and backgrounds shall be displayed in accordance with the requirements of the Championship Organisers and Motorsports UK regulations. The numbers and backgrounds shall be of regulation size (see Motorsports UK Yearbook J.4.1) with number backgrounds conforming to the following colours: White background with black numbers. SRCC, Yokohama and sponsor decals must be affixed on both sides of the vehicle; failure to comply will render the car ineligible.

5.17.2 Suppliers: Club and sponsor's decals will be available at each round.

5.18 TECHNICAL APPENDIX

5.18.1 SRCC CONTROLLED PARTS

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

PART	PART NUMBER	INFORMATION	
a)	Inlet Manifold	SRCC-IM1	Manufactured either by Scholar Race Engines (Part No.) or Jenvey Dynamics (Part no. MF09)
b)	Throttle Body (4)	SRCC-TB1	Separate 45mm parallel bodies produced by Jenvey Dynamics (Part no. SF45/0/0)
c)	Air Horn (4)	SRCC-AH1	40mm deep to suit 45mm Throttle Bodies. Produced by Jenvey Dynamics (part no. AH45x40)
d)	i Fuel Injector (4)	SRCC-FI1	Produced by Magneti Marelli (part no. 214300501011) Additionally marked "IW 058",
	ii Fuel Injector (4)	inev6-412	Produced by Bosch
e)	i ECU	MBE967	Produced, calibrated and programmed by MBE Systems (or their designated agent), with calibration to SRCC-CAL1.
	ii ECU	OMEX-SRCC	Produced, calibrated and programmed by Omex Technology
f)	i Clutch Plate	Cover CP5905-1	Manufactured by AP Racing. No modifications permitted
	ii Clutch Plate	Cover CP5905-500	Manufactured by AP Racing. No modifications permitted
g)	i Clutch Plate	Driven CP5352	Manufactured by AP Racing. No modifications permitted
	ii Clutch Plate	Driven CP5351	Manufactured by AP Racing. No modifications permitted
	iii Clutch Plate	Driven CP5354	Manufactured by AP Racing. No modifications permitted
h)	Rear Aerofoil	SRCC-RA1	Approved rear wing manufactured by Elite Carbon Fibre Ltd (07809 390316). No modification permitted

5.18.2 TECHNICAL INFORMATION AND DRAWINGS

ITEM	INFORMATION
a) Crank Sensor	Ford oe. item positioned using Ford alignment gauge part no.1S7F 6D313 AA with engine at TDC no.1 cylinder. set using Ford timing pin tool no.303-507 and crank pulley position checked by insertion of M6 bolt through checking hole in pulley into threaded hole in timing cover.
b) Camshaft Setting	Camshaft angular position/timing is set in relation to crank position using Ford cam alignment tool no.303-376 and timing pin (TDC) tool


SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

no.303-507.


- c) Rear wheel centre points The centre of the axis, about which the rear wheels rotate, while the vehicle is travelling in a forward or rearwards direction.
- d) Reference Area The complete area situated between a vertical and transversal plane 25.8cm forward of the front axle centre-line and a vertical and transversal plane 27.5cm rearward of the rear axle centre-line and across the outside of the front and rear rims.

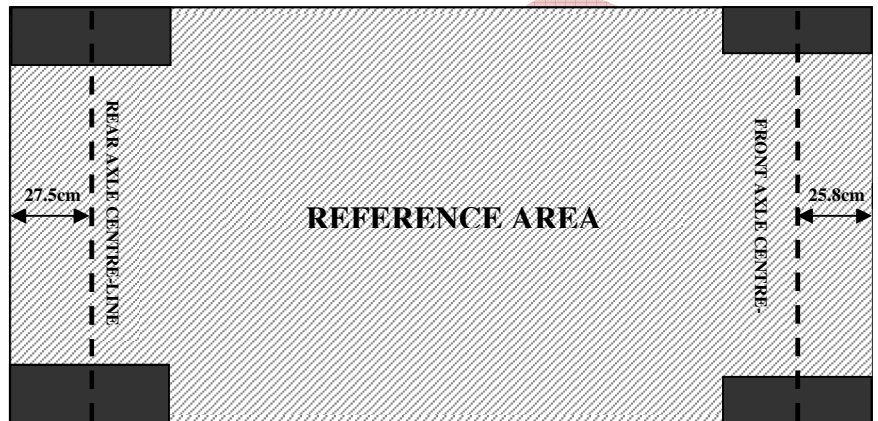

- e) Reference Zone An imaginary rectangular box situated between a vertical and transversal plane 25.8cm forward of the front axle centre-line and a vertical and transversal plane 110cm rearward of the rear axle centre-line, across the outside of the front and rear rims and to a height of 25.0cm above the ground plane, with the car at normal ride height.



- f) Engine Code Location



1. Engine Code
2. Engine Serial Number

6. APPENDICES:

APPENDIX 1



A socially-minded standard of behaviour is expected from everyone within the motorsport community.

By participating in a Motorsport UK event in any capacity you agree to follow the values of the Respect Code:

Motorsportuk.org/racewithrespect
#RaceWithRespect

The Values

- Respect
- Integrity
- Self-Control
- Fair play
- Good Manners

I pledge to #RaceWithRespect and:

- Contribute to a welcoming and friendly environment that ensures the safety and welfare of all participants.
- Always behave with integrity and uphold fairness in the sport; play my part in keeping the sport safety through your actions
- Treat everyone with respect, regardless of their gender, ethnic or social background, language, religious or other beliefs, disability, sexual identity or other status
- Recognise that we all represent the sport and therefore have a duty to be polite and respectful to all staff, officials, fellow competitors, volunteers, as well as fans and supporters
- Respect the rules, regulations and authority of the officials and Motorsport UK

Any breach of these obligations may result in disciplinary action.

The following Commercial Undertakings are not subject to the Judicial procedures of either the Championship Stewards and/or Motorsport UK/the MSC.

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

6.1 RACE ORGANISING CLUBS & CONTACTS:

Roger Donnan (Club Secretary)
Sports 2000 Racing Car Club
12 Friars lane
Beverley
East Yorkshire
HU17 0DF
Tel: 07538161230

MotorSport Vision Racing
Brands Hatch Circuit
Fawkham,
Kent,
DA3 8NG
Tel: 01474 875263

6.2. COMMERCIAL UNDERTAKINGS:

Vehicle Presentation: The presentation of the car is fundamental to the profile of the championship/series its sponsors and its audience. Therefore in considering whether to permit any car to race, and any point during the season, the organisers will regard as paramount the presentation of the car. In taking into account its appearance inherent in which is the standard of its presentation (including interior) they may exclude any car, which they consider may prejudice the reputation of the championship/series, or is otherwise unacceptable. This will include where the car is presented at a race event bearing accident damage sustained at a previous event and which has not been subject to the completion of an acceptable repair. Note: A Double Header can be regarded as one event for the purpose of this regulation.

All competitors will park in a neat and tidy manner only in the areas allocated to them by the Race Organisers and will keep these areas clean and tidy at all times. Any competitor failing to obey the instructions of the Organisers or an Official of the Meeting in these matters, in regard to their location, amount of space utilised or manner, in which it is utilised, may be reported to the Clerk of Course who may impose any penalty considered appropriate.

6.3. VEHICLE DECALS:

Championship decals must be carried in the positions outlined by the co-ordinator. Further, at all times the Championship sponsors have the right to forbid any decal to be displayed, which is deemed inappropriate.

6.4. PROMOTIONAL ACTIVITIES:

Competitors will be expected to co-operate and participate in such activities if requested.

Competitors must maintain a standard of appearance and behaviour acceptable to the organisers.

6.5. 2020 MEDIA WAIVER:

This race championship is being filmed for television broadcast and as such, permission is required for the television company to record drivers name, likeness, image, voice, sound effects, interview and performance on film, tape, or other media (the "recording") and edit such recording as the producer may desire, incorporate such recording into the television programme, or any versions of

SRCC SPORTS 2000 DURATEC CHAMPIONSHIP REGULATIONS

Issued by: SRCC 24/01/2022

Issue: Published

the television programme and all related materials thereof, including but not limited to promotion and advertising materials. The producer, and producer's successors and assigns, shall own all rights, title and interests, including the copyright, in and to the television programme, including the recording and related materials used therein. Drivers and Entrant/Drivers automatically agree to this 'media waiver' by completing the championship registration form.

7. REGISTRATION FORM.

~~Available as a Download from the website
<https://www.sports2000.co.uk/>~~

~~or
by contacting the Club Secretary.
Club Secretary: Roger Donnan
Tel: 07538161230
Email: info@sports2000.co.uk~~

[Registration is via the website at https://sports2000.co.uk/](https://sports2000.co.uk/)

PUBLISHED